



Red Hat Infrastructure Migration Solution 1.2

Infrastructure Migration Solution

Migrating from VMware to Red Hat Virtualization or Red Hat OpenStack Platform

Red Hat Infrastructure Migration Solution 1.2 Infrastructure Migration Solution

Migrating from VMware to Red Hat Virtualization or Red Hat OpenStack Platform

Red Hat Migration Documentation Team
migration-docs@redhat.com

Legal Notice

Copyright © 2020 Red Hat, Inc.

The text of and illustrations in this document are licensed by Red Hat under a Creative Commons Attribution–Share Alike 3.0 Unported license ("CC-BY-SA"). An explanation of CC-BY-SA is available at

<http://creativecommons.org/licenses/by-sa/3.0/>

. In accordance with CC-BY-SA, if you distribute this document or an adaptation of it, you must provide the URL for the original version.

Red Hat, as the licensor of this document, waives the right to enforce, and agrees not to assert, Section 4d of CC-BY-SA to the fullest extent permitted by applicable law.

Red Hat, Red Hat Enterprise Linux, the Shadowman logo, the Red Hat logo, JBoss, OpenShift, Fedora, the Infinity logo, and RHCE are trademarks of Red Hat, Inc., registered in the United States and other countries.

Linux[®] is the registered trademark of Linus Torvalds in the United States and other countries.

Java[®] is a registered trademark of Oracle and/or its affiliates.

XFS[®] is a trademark of Silicon Graphics International Corp. or its subsidiaries in the United States and/or other countries.

MySQL[®] is a registered trademark of MySQL AB in the United States, the European Union and other countries.

Node.js[®] is an official trademark of Joyent. Red Hat is not formally related to or endorsed by the official Joyent Node.js open source or commercial project.

The OpenStack[®] Word Mark and OpenStack logo are either registered trademarks/service marks or trademarks/service marks of the OpenStack Foundation, in the United States and other countries and are used with the OpenStack Foundation's permission. We are not affiliated with, endorsed or sponsored by the OpenStack Foundation, or the OpenStack community.

All other trademarks are the property of their respective owners.

Abstract

This guide describes how to migrate VMware virtual machines to Red Hat Virtualization or Red Hat OpenStack Platform, using Red Hat CloudForms.

Table of Contents

PREFACE	5
PART I. MIGRATING FROM VMWARE TO RED HAT VIRTUALIZATION	6
CHAPTER 1. UNDERSTANDING THE MIGRATION	7
1.1. UNDERSTANDING THE MIGRATION PROCESS	7
1.2. MIGRATION NETWORK REQUIREMENTS	8
CHAPTER 2. PLANNING THE MIGRATION	9
2.1. QUESTIONS TO ASK BEFORE MIGRATION	9
2.1.1. How long will the migration take?	9
2.1.2. What operating systems can I migrate?	10
2.1.3. How many conversion hosts do I need?	10
2.1.4. Should I migrate my virtual machines with VDDK or with SSH?	10
2.2. OPTIMIZING PERFORMANCE FOR MIGRATION	10
2.2.1. Optimizing the migration environment	10
2.2.2. Optimizing conversion host performance	11
2.2.3. Scheduling the migration	12
2.2.4. Grouping virtual machines for migration	12
CHAPTER 3. PREPARING THE MIGRATION ENVIRONMENT	13
3.1. SOFTWARE COMPATIBILITY	13
3.2. PREPARING THE VMWARE ENVIRONMENT	13
3.2.1. Preparing the VMware network	13
3.2.2. Preparing the VMware virtual machines	13
3.2.3. Configuring a VMware hypervisor for more than 10 concurrent migrations	14
3.3. INSTALLING AND CONFIGURING THE RED HAT ENVIRONMENT	14
3.3.1. Installing and configuring Red Hat Virtualization	14
3.3.2. Configuring an existing Red Hat Virtualization environment	15
3.3.3. Installing and configuring Red Hat CloudForms	16
3.3.4. Installing and configuring Red Hat CloudForms in a distributed environment	16
3.4. CONFIGURING THE RED HAT VIRTUALIZATION CONVERSION HOSTS	17
3.4.1. Downloading the VMware Virtual Disk Development Kit	17
3.4.2. Configuring the Red Hat Virtualization conversion hosts for VDDK transformation	18
3.4.3. Verifying the conversion hosts	20
CHAPTER 4. MIGRATING THE VIRTUAL MACHINES	21
4.1. MIGRATION PREREQUISITES	21
4.1.1. Enabling Ansible in CloudForms	21
4.1.1.1. Creating a premigration playbook for Windows virtual machines	21
4.1.1.2. Creating a premigration playbook for Linux virtual machines	21
4.1.2. Creating a CSV file to add virtual machines to the migration plan	22
4.2. CREATING AN INFRASTRUCTURE MAPPING	22
4.3. CREATING AND RUNNING A MIGRATION PLAN	24
4.3.1. Scheduling a saved migration plan	27
4.3.2. Canceling a migration plan in progress	27
4.3.3. Retrying a failed migration plan	27
4.3.4. Changing the maximum number of concurrent migrations	27
CHAPTER 5. TROUBLESHOOTING	29
5.1. MIGRATION LOGS	29
5.1.1. Downloading the conversion host and playbook logs	29
5.1.2. Accessing the CloudForms migration log	29

5.2. COMMON ISSUES AND MISTAKES	30
5.2.1. Infrastructure mapping errors	30
5.2.2. Migration plan errors	30
5.2.3. IP address errors	30
5.2.4. Environment configuration errors	30
5.3. KNOWN ISSUES	31
APPENDIX A. CONFIGURING THE RED HAT VIRTUALIZATION ENVIRONMENT FOR SSH TRANSFORMATION	32
A.1. CONFIGURING THE VMWARE HYPERVISORS FOR SSH TRANSFORMATION	32
A.2. REINSTALLING THE IPA-CLIENT IN THE RED HAT VIRTUALIZATION MANAGER	33
A.3. CONFIGURING THE RED HAT VIRTUALIZATION CONVERSION HOSTS FOR SSH TRANSFORMATION	34
A.4. COPYING THE VMWARE SSH KEYS TO THE CONVERSION HOSTS	35
A.4.1. Copying keys collected during VMware hypervisor configuration	35
A.4.2. Copying keys collected with ssh-keyscan	35
A.5. CONFIGURING SECURE REMOTE LOGIN TO THE VMWARE HYPERVISORS	36
PART II. MIGRATING FROM VMWARE TO RED HAT OPENSTACK PLATFORM	38
CHAPTER 6. UNDERSTANDING THE MIGRATION	39
6.1. UNDERSTANDING THE MIGRATION PROCESS	39
6.2. MIGRATION NETWORK REQUIREMENTS	40
CHAPTER 7. PLANNING THE MIGRATION	41
7.1. QUESTIONS TO ASK BEFORE MIGRATION	41
7.1.1. How long will the migration take?	41
7.1.2. What operating systems can I migrate?	42
7.1.3. How many conversion hosts do I need?	42
7.1.4. Should I migrate my virtual machines with VDDK or with SSH?	42
7.2. OPTIMIZING PERFORMANCE FOR MIGRATION	42
7.2.1. Optimizing the migration environment	42
7.2.2. Optimizing conversion host performance	43
7.2.3. Scheduling the migration	44
7.2.4. Grouping virtual machines for migration	44
CHAPTER 8. PREPARING THE MIGRATION ENVIRONMENT	46
8.1. SOFTWARE COMPATIBILITY	46
8.2. PREPARING THE VMWARE ENVIRONMENT	46
8.2.1. Preparing the VMware network	46
8.2.2. Preparing the VMware virtual machines	46
8.2.3. Configuring a VMware hypervisor for more than 10 concurrent migrations	47
8.3. INSTALLING AND CONFIGURING THE RED HAT ENVIRONMENT	47
8.3.1. Installing and configuring Red Hat OpenStack Platform	47
8.3.2. Configuring an existing Red Hat OpenStack Platform environment	48
8.3.3. Installing and configuring Red Hat CloudForms	49
8.3.4. Installing and configuring Red Hat CloudForms in a distributed environment	49
8.4. CREATING AND CONFIGURING THE RED HAT OPENSTACK PLATFORM CONVERSION HOSTS	50
8.4.1. Creating a Red Hat OpenStack Platform conversion host	51
8.4.2. Downloading the VMware Virtual Disk Development Kit	51
8.4.3. Configuring the Red Hat OpenStack Platform conversion hosts for VDDK transformation	52
8.4.4. Verifying the conversion hosts	53
CHAPTER 9. MIGRATING THE VIRTUAL MACHINES	54
9.1. MIGRATION PREREQUISITES	54

9.1.1. Enabling Ansible in CloudForms	54
9.1.1.1. Creating a premigration playbook for Windows virtual machines	54
9.1.1.2. Creating a premigration playbook for Linux virtual machines	54
9.1.2. Creating a CSV file to add virtual machines to the migration plan	55
9.2. CREATING AN INFRASTRUCTURE MAPPING	55
9.3. CREATING AND RUNNING A MIGRATION PLAN	57
9.3.1. Scheduling a saved migration plan	60
9.3.2. Canceling a migration plan in progress	60
9.3.3. Retrying a failed migration plan	60
9.3.4. Changing the maximum number of concurrent migrations	60
CHAPTER 10. TROUBLESHOOTING	62
10.1. MIGRATION LOGS	62
10.1.1. Downloading the conversion host and playbook logs	62
10.1.2. Accessing the CloudForms migration log	62
10.2. COMMON ISSUES AND MISTAKES	63
10.2.1. Infrastructure mapping errors	63
10.2.2. Migration plan errors	63
10.2.3. IP address errors	63
10.2.4. Environment configuration errors	64
10.3. KNOWN ISSUES	64
APPENDIX B. CONFIGURING THE RED HAT OPENSTACK PLATFORM ENVIRONMENT FOR SSH TRANSFORMATION	66
B.1. CONFIGURING THE VMWARE HYPERVISORS FOR SSH TRANSFORMATION	66
B.2. CONFIGURING THE RED HAT OPENSTACK PLATFORM CONVERSION HOSTS FOR SSH TRANSFORMATION	67
B.3. COPYING THE VMWARE SSH KEYS TO THE CONVERSION HOSTS	69
B.3.1. Copying keys collected during VMware hypervisor configuration	69
B.3.2. Copying keys collected with ssh-keyscan	69

PREFACE

Red Hat Infrastructure Migration Solution 1.2 enables you to migrate virtual machines from VMware to Red Hat Virtualization or Red Hat OpenStack Platform, using Red Hat CloudForms.

Red Hat Virtualization

Red Hat Virtualization (RHV) provides a virtualization platform built on Red Hat Enterprise Linux (RHEL). You can manage your virtual infrastructure, including hosts, virtual machines, networks, storage, and users, from a centralized graphical user interface or with a REST API. See [RHV 4.4 documentation](#) for more information. RHV 4.3 is also [supported](#).

Red Hat OpenStack Platform

Red Hat OpenStack Platform (RHOSP) provides a scalable, fault-tolerant, private or public cloud based on Red Hat Enterprise Linux. RHOSP 13 and 16 are supported. See [RHOSP 16 documentation](#) for more information.

Red Hat CloudForms

Red Hat CloudForms is the environment in which you perform the migration. CloudForms is a unified set of management tools for use across virtualized, private cloud, and public cloud platforms. See [CloudForms 5.0](#) documentation for more information.

PART I. MIGRATING FROM VMWARE TO RED HAT VIRTUALIZATION


This guide describes how to plan your migration, to prepare the VMware and Red Hat Virtualization environments, and to migrate your VMware virtual machines.

CHAPTER 1. UNDERSTANDING THE MIGRATION

1.1. UNDERSTANDING THE MIGRATION PROCESS

This workflow describes the process of migrating VMware virtual machines to Red Hat Virtualization (RHV).

Figure 1.1. VMware to RHV migration workflow

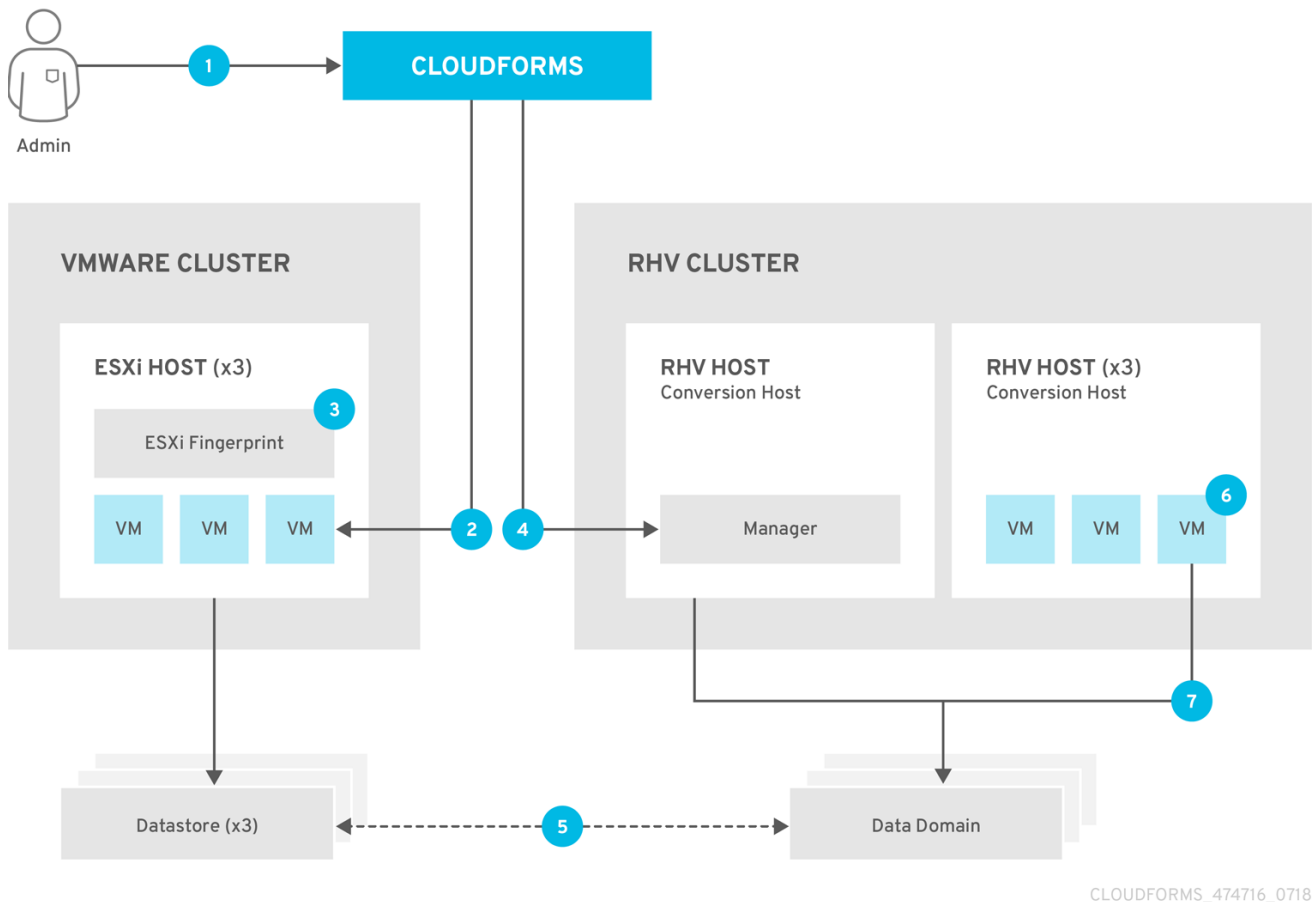

CLOUDFORMS_474716_0718

- 1 You create and run a migration plan in the CloudForms user interface.
- 2 CloudForms uses the migration plan to locate the VMware virtual machines.
- 3 CloudForms captures the VMware ESXi host fingerprint for authentication during the migration process.
- 4 CloudForms initiates communication with the RHV conversion hosts. RHV conversion hosts are bare metal hosts with **virt-v2v** and **virt-v2v-wrapper** installed.
- 5 The **virt-v2v-wrapper** connects to the VMware datastore through the ESXi host. **virt-v2v** streams the VMware virtual disks to the Red Hat data domain and converts the disks.

6

The **virt-v2v-wrapper** creates a RHV virtual machine and uses the VMware virtual machine's metadata to preserve its attributes (tags, power state, MAC address, CPU count, memory, disks, and virtual machine name) after migration.

7

virt-v2v attaches the converted disks to the RHV virtual machine. The RHV virtual machine's power state is the same as the VMware virtual machine's power state.

The migration process is complete and the migration plan status is displayed in the CloudForms user interface.

1.2. MIGRATION NETWORK REQUIREMENTS

The network communication between the VMware environment, the Red Hat environment, the conversion hosts, and CloudForms must be uninterrupted and reliable.

The firewall rules must enable the following ports for migration.

Table 1.1. Firewall rules for migration

Port	Protocol	Source	Destination
22	TCP	CloudForms	Conversion hosts
443	TCP	CloudForms	RHV Manager
443	TCP	CloudForms	VMware ESXi hosts
902	TCP	CloudForms	VMware ESXi hosts
902	TCP	Conversion hosts	VMware ESXi hosts
5480	TCP	Conversion hosts	VMware vCenter

CHAPTER 2. PLANNING THE MIGRATION

This section provides guidelines for planning your migration.

2.1. QUESTIONS TO ASK BEFORE MIGRATION

The following questions can help you to estimate the resources and time required for migration.

What am I migrating?

- Identify the VMware virtual machines that you will be migrating.

What am I missing?

- Identify resource gaps, such as bandwidth, storage, licenses, or a suitable maintenance window, before you begin the migration.

What is the maximum number of disks or virtual machines that I can migrate?

- There is no maximum number of disks or virtual machines that you can migrate. However, you may not want to migrate all your virtual machines at the same time, in order to minimize the impact on your users.



IMPORTANT

If you exceed the capabilities of your environment, the migration will fail. This situation could affect existing applications running on virtual machines attached to the network and storage.

What impact will the migration have on my users?

- Assess the effects the migration may have on a production environment.
It may be possible to migrate your applications in phases, without downtime at the application layer, if the applications are distributed in a high-availability architecture.
- Check whether users will lose access to critical applications.

2.1.1. How long will the migration take?

There is no formula to estimate how long the actual migration will take. Migration speed is determined by your hardware, network speed, and other factors.

The following example is provided as a guide:

Example 2.1. Migration to Red Hat Virtualization 4.4, with [Smart Zero Write](#)

Duration: 55 minutes

Speed: 603 MBps

Environment:

- 20 virtual machines with 100 GB disks (66 GB usage)

- Two conversion hosts (24 CPUs each), with a maximum of ten concurrent migrations each
- SSD storage
- iSCSI interface between VMware hosts and storage
- Fiber Channel interface with multipath access between Red Hat hosts and storage
- 10 GbE NICs

2.1.2. What operating systems can I migrate?

You can migrate any guest operating system that is [certified and supported](#).

2.1.3. How many conversion hosts do I need?

The number of conversion hosts you create depends on the size of your migration. All the virtual machines in a migration plan are migrated at the same time, in parallel. The number of virtual machines that you can migrate simultaneously depends on your infrastructure capabilities. Each migration requires a certain amount of network bandwidth, I/O throughput, and processing power for the conversion process.

Multiple conversion hosts provide load-balancing and better performance, even for small migrations.

Conversion hosts are limited to a maximum of ten concurrent migrations, unless you change the default values.

You should test your environment thoroughly before the migration to determine how many migrations it can support without negative effects, for example, five conversion hosts, each running ten concurrent migrations.

2.1.4. Should I migrate my virtual machines with VDDK or with SSH?

You can migrate your virtual machines with either the VMware Virtual Disk Development Kit (VDDK) or SSH. VDDK is the default because it is much faster than SSH and easier to configure.

VDDK is limited to 20 concurrent migrations per conversion host, because of network limitations, and 10 concurrent migrations per VMware hypervisor, unless you increase the hypervisor's NFC service memory.

If you cannot use VDDK, SSH is a fallback option.

2.2. OPTIMIZING PERFORMANCE FOR MIGRATION

You can minimize the impact of the migration on your environment and improve performance.

For details on performance-related configurations, see [Performance recommendations for migrating from VMware to Red Hat Virtualization or Red Hat OpenStack Platform with IMS](#).

2.2.1. Optimizing the migration environment

You can configure the VMware and Red Hat environments to optimize your migration.

VMware environment

You can improve performance with the following configurations:

- Extend the VMware virtual machine network to the Red Hat environment.
- Ensure that the VMware network provides high throughput.
VMware and Red Hat hosts often have multiple network interfaces. By default, the conversion hosts use the VMware hosts' admin interface to import virtual machines. Configure your routing for the fastest possible connection between the VMware and Red Hat environment. You can use host routes or IP table filtering to control the traffic flow.
- Ensure that the VMware network does not affect production machines, for example, by using a backup network to avoid overload.
- Divide the VMware virtual machines equally between two VMware hosts, if possible.
- Remove unnecessary data from the VMware disks.

Red Hat environment

You can improve performance with the following configurations:

- Update your Red Hat environment to the latest z-stream release and install required patches.
- Use fast, full SSD storage.
- Ensure that the network connection between the bare metal hosts and storage is at least 10 GbE.
- Use Fibre Channel interfaces between the hosts and storage.
- Configure multipath access between the hosts and storage.

2.2.2. Optimizing conversion host performance

You can improve performance with the following conversion host configurations:

- Configure midrange or high-end machines, with at least 10 GB of available RAM and 4 CPUs, as conversion hosts.
If you increase the maximum number of concurrent migrations beyond **10** (up to **20** concurrent migrations), add 1 GB RAM for each additional migration.



NOTE

If you increase the maximum number of concurrent migrations, you must perform test migrations to assess the capabilities of your environment's infrastructure and to ensure that the actual migration does not fail.

- Enable high performance and disable power-saving in the BIOS settings of the bare metal hosts.
- Ensure that the conversion host is not hosting virtual machines with heavy read/write workloads during the migration.
- Ensure that virtual machines on the conversion host are idle during the migration process. Their presence will not affect migration performance.

- Deploy multiple conversion hosts (up to 5) for load-balancing and improved performance. The virtual machines in a migration plan are automatically distributed among the conversion hosts. This decreases the load on the conversion hosts and allows you to increase the concurrent migrations beyond the limits of a single conversion host.

2.2.3. Scheduling the migration

You can improve performance and minimize the impact on your users by scheduling the migration carefully:

- Prepare your users for downtime.
Currently, IMS supports only cold migration. Virtual machines are powered off gracefully as part of the migration process.
- Stagger the migration schedules.
- Move critical applications during maintenance windows.
- Schedule the migration when storage input/output usage is low.
- Create multiple migration plans for finer control.

2.2.4. Grouping virtual machines for migration

You can improve performance and minimize the impact on your users by creating migration groups of virtual machines:

- Create migration groups for your virtual machines, so that you are not migrating all of them at the same time.
- Migrate virtual machines as a group, rather than individually.
You can deploy up to 5 conversion hosts, with each host migrating up to 20 virtual machines concurrently. **These limits should not be exceeded.**
- Consider the following questions when creating migration groups:
 - How are the virtual machines grouped now?
 - Which virtual machines should be migrated together?
 - Which workloads or linked applications should be migrated together?
 - What applications must remain available?
- Consider which parts of the workload to migrate first:
 - Databases
 - Applications
 - Web servers
 - Load balancers

CHAPTER 3. PREPARING THE MIGRATION ENVIRONMENT

You can prepare the VMware and Red Hat environments for migration.

3.1. SOFTWARE COMPATIBILITY

Ensure that your software versions are compatible.

Software	Version
VMware	6.0 or later
VMware Virtual Disk Development Kit (VDDK)	- VMware 6.0 and 6.5: VDDK 6.5 - VMware 6.7: VDDK 6.7 - VMware 7.0: VDDK 7.0
Red Hat Virtualization	4.3 and 4.4
Red Hat CloudForms	5.0

3.2. PREPARING THE VMWARE ENVIRONMENT

You can prepare the VMware network and virtual machines for migration.

If you are performing more than ten concurrent migrations from a single VMware hypervisor, you can configure the hypervisor.

3.2.1. Preparing the VMware network

You can prepare the VMware network for migration:

- Ensure that IP addresses, VLANs, and other network configuration settings are not changed before or after migration. The migration process preserves the VMware virtual machines' MAC addresses.



NOTE

See [Section 1.2, “Migration network requirements”](#) for firewall rules.

3.2.2. Preparing the VMware virtual machines

You can prepare the VMware virtual machines for migration.

Procedure

- Download and install [VMware Tools](#) to preserve the IP addresses.
- Unmount mounted ISO/CDROM disks.

3. Ensure that each NIC has no more than one IPv4 and/or one IPv6 address.
4. Ensure that the virtual machine names contain only upper- or lower-case letters, numbers, underscores (`_`), hyphens (`-`), or periods (`.`).
5. Ensure that the VMware virtual machine names do not duplicate names of virtual machines in the Red Hat Virtualization environment.

3.2.3. Configuring a VMware hypervisor for more than 10 concurrent migrations

If you are performing more than 10 concurrent migrations from a VMware hypervisor using VDDK transformation, the migration will fail because the hypervisor's NFC service memory buffer is limited to 10 parallel connections. See [VMware Virtual Disk Programming Guide NFC session connection limits](#) and [Virt-v2v. VDDK: ESXi NFC service memory limits](#) for details.

You can increase the hypervisor's NFC service memory to enable additional connections for migrations.

Procedure

1. Log in to a VMware hypervisor as root.
2. Change the value of **maxMemory** to **1000000000** in **/etc/vmware/hostd/config.xml**:

```
...
    <nfcsvc>
      <path>libnfcsvc.so</path>
      <enabled>true</enabled>
      <maxMemory>1000000000</maxMemory>
      <maxStreamMemory>10485760</maxStreamMemory>
    </nfcsvc>
...
```

3. Restart **hostd**:

```
# /etc/init.d/hostd restart
```

You do not need to reboot the VMware hypervisor.

3.3. INSTALLING AND CONFIGURING THE RED HAT ENVIRONMENT

You can install and configure Red Hat Virtualization and one or more CloudForms appliances for migration.

3.3.1. Installing and configuring Red Hat Virtualization

You can install and configure Red Hat Virtualization (RHV) 4.3 or 4.4 for migration.

Prerequisites

1. Set the BIOS settings of bare metal hosts for optimal performance, rather than power-saving, according to the vendor's recommendations.
2. Disable CPU enhanced halt (C1E) in the BIOS settings, if applicable.

Procedure

1. Install [RHV Manager 4.4](#) on a bare metal host.
For RHV 4.3, install [RHV Manager 4.3](#) on a bare metal host.
2. Install [Red Hat Virtualization Host 4.4](#) or [Red Hat Enterprise Linux 8](#) on bare metal hosts.
For RHV 4.3, install [Red Hat Virtualization Host 4.3](#) or [Red Hat Enterprise Linux 7](#) on bare metal hosts.



NOTE

Some of these hosts will be deployed as conversion hosts. The number of conversion hosts depends on your migration size and infrastructure capabilities.

3. Create and attach [data and ISO storage domains](#) to the data center.




NOTE

You can only migrate to shared storage, such as NFS, iSCSI, or FCP. Local storage is not supported.

Although the ISO storage domain has been deprecated, it is required for migration.

4. [Upload the VirtIO and RHV Guest Tools image files to the ISO storage domain](#) .
The VirtIO file name must include the version number (**virtio-win-version.iso**). The guest tools are required for migrating Windows virtual machines.
5. Optionally, you can [create a MAC address pool](#) that includes the MAC addresses of the VMware virtual machines to be migrated.



IMPORTANT

If the Red Hat Virtualization MAC address pool range overlaps the VMware MAC address range, you must ensure that the MAC addresses of the migrating virtual machines do not duplicate those of existing virtual machines. Otherwise, the migration will fail.

If you do not create a MAC address pool, the migrated virtual machines will not have MAC addresses in the same range as virtual machines created in Red Hat Virtualization.

3.3.2. Configuring an existing Red Hat Virtualization environment

If you are migrating to an existing Red Hat Virtualization (RHV) environment, check the following:

- Upgrade RHV to the latest z-stream release.
- Check each conversion host for valid subscriptions and repositories:

```
# subscription-manager list --consumed
# yum repolist
```

- Check each conversion host for existing SSH private keys in **/var/lib/vdsm/.ssh/id_rsa**.

Delete the keys manually before configuring the host. Conversion host configuration does not overwrite existing keys.

- If the MAC address pool range overlaps the VMware MAC address range, ensure that the MAC addresses of the migrating virtual machines do not duplicate those of existing virtual machines. If you do not create a MAC address pool, the migrated virtual machines will not have MAC addresses in the same range as virtual machines created in Red Hat Virtualization.

3.3.3. Installing and configuring Red Hat CloudForms

You can install and configure Red Hat CloudForms for migration.

If you change or remove a provider in CloudForms, your infrastructure mappings or migration plans will have errors. You must delete and re-create the infrastructure mappings or migration plans.

Procedure

1. Install [CloudForms 5.0](#) on the Manager machine.
2. [Add VMware vCenter to CloudForms](#) as an infrastructure provider.
3. [Authenticate the VMware vCenter hosts](#).
4. [Add Red Hat Virtualization to CloudForms](#) as an infrastructure provider.
5. Click **Compute → Infrastructure → Providers** to verify that CloudForms can access the providers and hosts.
6. Synchronize the server and client clocks, if possible, to ensure that migration time counters are aligned.

3.3.4. Installing and configuring Red Hat CloudForms in a distributed environment

You can install Red Hat CloudForms in a distributed environment, with appliances on your user interface, database, and worker machines.



NOTE

If you create an infrastructure mapping or migration plan and then remove or change a provider in CloudForms, the mapping or plan must be deleted and re-created.

Procedure

1. Install Red Hat CloudForms on [Red Hat Virtualization \(RHV\)](#) or [VMware](#).
2. [Configure the worker appliances](#), if necessary.
3. [Enable the required server roles](#) in the CloudForms user interface:
 - Database: No server roles required
 - User interface:
 - Database Operations
 - User Interface

- Web Services
- Worker:
 - Automation Engine
 - Capacity & Utilization Coordinator
 - Capacity & Utilization Data Collector
 - Capacity & Utilization Data Processor
 - Database Operations
 - Event Monitor
 - Provider Inventory
 - Provider Operations
 - Reporting
 - Scheduler
 - SmartState Analysis
 - Web Services
- 4. [Add VMware to CloudForms](#) as an infrastructure provider.
- 5. [Authenticate the VMware vCenter hosts](#).
- 6. [Add RHV to CloudForms](#) as an infrastructure provider.
- 7. Click **Compute** → **Infrastructure** → **Providers** to verify that CloudForms can access the providers and hosts.
- 8. Configure the [Capacity and Utilization Collection Settings](#) of the CloudForms worker appliances to collect data from the VMware and Red Hat providers.

3.4. CONFIGURING THE RED HAT VIRTUALIZATION CONVERSION HOSTS

You can configure the Red Hat Virtualization conversion hosts in the CloudForms user interface to use the VMware Virtual Disk Development Kit (VDDK). VDDK converts the VMware disks.



NOTE

See [Section 3.1, “Software compatibility”](#) for the required VDDK version.

3.4.1. Downloading the VMware Virtual Disk Development Kit

You can download the VMware Virtual Disk Development Kit (VDDK).

Procedure

1. In a browser, navigate to the [VMware {code}](#) site and click **SDKS**.
2. Click **Virtual Disk Development Kit (VDDK)**
3. Select the VDDK release specified for your VMware version.
4. Click **Download** and log in with your VMware account credentials.
5. Save the VDDK archive file and record its path.

3.4.2. Configuring the Red Hat Virtualization conversion hosts for VDDK transformation

You can configure the Red Hat Virtualization (RHV) conversion hosts for VDDK transformation in the CloudForms user interface.

Prerequisites

- If the RHV provider has been active for a while, verify that each host has valid subscriptions and repositories by logging in using SSH and running the following commands:

```
# subscription-manager list --consumed
# yum repolist
```
- If a RHV host has an existing SSH private key in `/var/lib/vdsm/.ssh/id_rsa`, delete the key manually before configuring the host. Conversion host configuration does not overwrite existing keys.

Procedure

1. In CloudForms, click **Compute → Migration → Migration Settings**.
2. In the **Conversion Hosts** tab, click **Configure Conversion Host**. The **Configure Conversion Host** wizard is displayed.

3. In the **Location** screen, select a **Provider Type**.
4. Select a **Provider**.
5. Select a **Cluster** and click **Next**.
6. In the **Host(s)** screen, select one or more hosts from the dropdown list and click **Next**.
7. In the **Authentication** screen, click **Browse** to browse to the Manager's SSH private key or paste it in the **Conversion host SSH private key** field.
The Manager deploys a private SSH key on the conversion hosts in order to send commands and run playbooks. The default key file is `/etc/pki/ovirt-engine/keys/engine_id_rsa` on the Manager machine.
8. Select **VDDK** as the **Transformation method**.
9. Enter the path of the VDDK package in the **VDDK library path** field.
10. Click **Configure**.
11. In the **Results** screen, wait for the conversion host configuration to finish and click **Close**.
The configured conversion hosts and status information, including error messages, appear in the **Configured Conversion Hosts** list.

If an error occurs, you can download the conversion host configuration log by clicking the **More Actions** icon () and selecting **Download Log**.

You can click **Retry** if the conversion host configuration failed for reasons unconnected with your environment.

3.4.3. Verifying the conversion hosts

You can verify your conversion hosts by using the CloudForms API.

Procedure

1. Verify the conversion hosts:

```
$ curl -s -k -u <user>:<password> 'https://<CloudForms_FQDN>/api/conversion_hosts' 1
```

- 1** Specify your CloudForms user name, password, and FQDN.

The conversion host IDs appear at the end of the **resources** URL, after **/api/conversion_hosts/**:

```
{
  "name": "conversion_hosts",
  ...
  "resources": [{ "href": "https://<CloudForms_FQDN>/api/conversion_hosts/10000000000001" },
    { "href": "https://<CloudForms_FQDN>/api/conversion_hosts/10000000000002" },
    { "href": "https://<CloudForms_FQDN>/api/conversion_hosts/10000000000003" },
    ...
  ]
}
```

CHAPTER 4. MIGRATING THE VIRTUAL MACHINES

You can create an infrastructure mapping in the CloudForms user interface. You then create and run a migration plan.

Optionally, you can [change the maximum number of concurrent migrations for conversion hosts or providers](#) to control the migration process.

4.1. MIGRATION PREREQUISITES

This section describes the migration prerequisites.

4.1.1. Enabling Ansible in CloudForms

You must enable Ansible in CloudForms in order to run premigration playbooks to preserve the IP addresses of migrated virtual machines.

You can also create Ansible playbooks to run postmigration playbooks to clean up your environment.

Procedure

1. Log in to the CloudForms user interface.
2. [Enable the **Embedded Ansible** server role.](#)
3. [Add an Ansible playbook repository .](#)
4. [Add the credentials](#) of each virtual machine that you are migrating.
5. [Add your playbook as an Ansible service catalog item .](#)

You will select the playbooks and the virtual machines on which they run when you create the migration plan.

4.1.1.1. Creating a premigration playbook for Windows virtual machines

You must create a premigration playbook to preserve the IP address of Windows virtual machines.

See [Static IP is not getting assigned to the Windows guest after the migration from VMware to RHV](#) for details.

4.1.1.2. Creating a premigration playbook for Linux virtual machines

You must create a premigration playbook to preserve the IP address of RHEL and other Linux virtual machines.

Prerequisites

- The **rhel-<version>-server-rpms** repository must be enabled for the VMware virtual machines. If you have disabled it, you can re-enable it in the premigration playbook.

Procedure

1. [Install the **ims.rhel_premigration** role](#) with Ansible Galaxy.

2. Create a **RHEL premigration** playbook according to the following example:

```
---
- hosts: <hosts> 1
  vars:
    rhsm_repositories:
      - "rhel-<version>-server-rpms"
  roles:
    - role: ims.rhel_pre_migration
```

- 1** Specify the VMware hosts on which you are running this playbook.

4.1.2. Creating a CSV file to add virtual machines to the migration plan

If you are migrating virtual machines that were migrated in the past, you must add the virtual machines to the migration plan with a CSV file, because the migration plan cannot discover them automatically.



NOTE

A CSV file is optional, but recommended, for large migrations because it is faster than manually selecting individual virtual machines.

Table 4.1. CSV file fields

Field	Comments
Name	Virtual machine name. Required
Host	Optional . Only required if virtual machines have identical Name fields.
Provider	Optional . Only required if virtual machines have identical Name and Host fields.

CSV file example

```
Name,Host,Provider
vm01,host1,vSphere3
vm02,host1,vSphere3
vm03,host1,vSphere3
```

4.2. CREATING AN INFRASTRUCTURE MAPPING

The infrastructure mapping maps the resources of your VMware and Red Hat environments.



IMPORTANT

If you add or remove providers or provider objects from an infrastructure mapping, the mapping will have missing resource errors. You must delete the infrastructure mapping and create a new one.

Procedure

1. Click **Compute** → **Migration** → **Infrastructure Mappings**.
2. Click **Create Infrastructure Mapping**. The **Create Infrastructure Mapping** wizard is displayed.

The screenshot shows the 'Create Infrastructure Mapping' wizard with the 'General' tab selected. The wizard has five steps: General (1), Map Compute (2), Map Storage (3), Map Networks (4), and Results (5). The 'General' tab contains the following fields:

- Name ***: A text input field with a maximum length of 24 characters.
- Description**: A text input field with a maximum length of 128 characters.
- Target Provider**: A dropdown menu showing 'Red Hat Virtualization' as the selected option. The dropdown list also includes '<Choose>', 'Red Hat Virtualization', and 'Red Hat OpenStack Platform'.


At the bottom right of the wizard, there are three buttons: 'Cancel', '< Back', and 'Next >'.

3. In the **General** screen, enter the infrastructure mapping name and (optional) description.
4. Select the **Target Provider** and click **Next**.
5. In the **Map Compute** screen, select a **Source Provider \ Datacenter \ Cluster** and a **Target Provider \ Datacenter \ Cluster**.
If the target cluster does not contain a conversion host, a warning icon () appears. You can create and save an infrastructure mapping, but you must configure the conversion hosts before running a migration plan.
6. Click **Add Mapping**. You can map additional clusters.
7. Click **Next**.
8. In the **Map Storage** screen, select a **Source Provider \ Datacenter \ Datastore** and **Target Datastores**.
9. Click **Add Mapping**. You can map additional datastores.
10. Click **Next**.
11. In the **Map Networks** screen, select a source cluster.

12. Select one or more networks from **Source Provider \ Datacenter \ Network** and **Target Project \ Network**.
13. Click **Add Mapping**. You can map the networks of additional source clusters.
14. Click **Create**.
15. Click **Close**. The infrastructure mapping is saved in **Compute → Migration → Infrastructure Mappings**.

You can click an infrastructure mapping element to view its details:

Infrastructure Mappings list

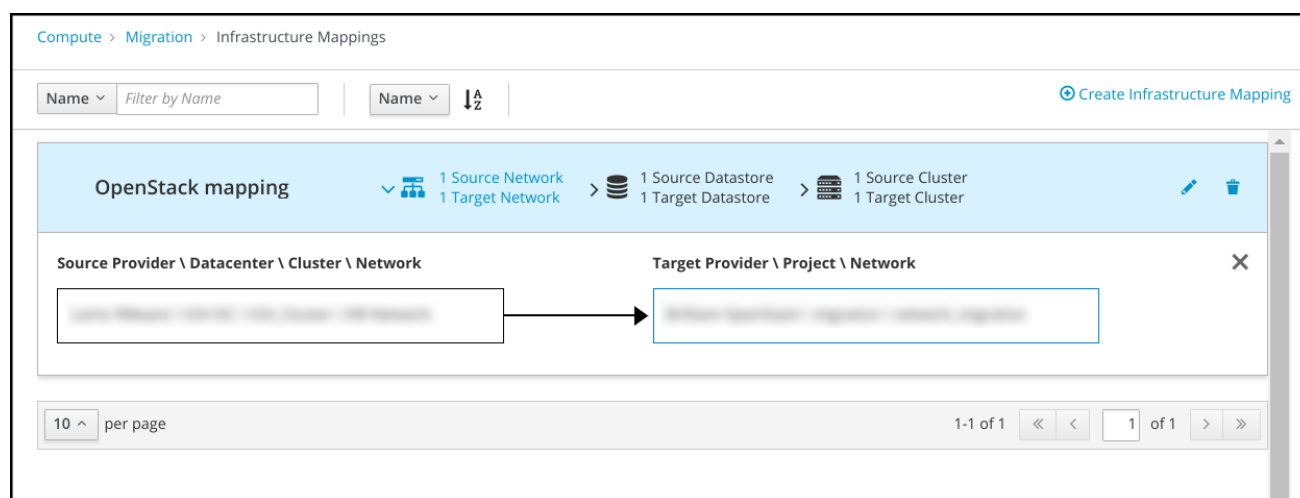

4.3. CREATING AND RUNNING A MIGRATION PLAN

Before attempting a large migration, you should perform several test migrations with different maximum numbers of concurrent migrations for your conversion hosts or providers. This will enable you to assess the capabilities of your environment's infrastructure.



NOTE

A CSV file is optional, but recommended, for large migrations because it is faster than manually selecting each virtual machine.

Procedure

1. Click **Compute → Migration → Migration Plans**.
2. Click **Create Migration Plan**. The **Create Migration Plan** wizard is displayed.

The screenshot shows the 'Create Migration Plan' dialog box with the 'General' tab selected. The dialog has a progress bar at the top with five steps: General (1), VMs (2), Advanced Options (3), Schedule (4), and Results (5). The 'General' tab contains the following fields and options:

- Infrastructure Mapping ***: A drop-down menu showing '<Choose>'.
- Name ***: A text input field with a note 'Maximum length is 24 characters.'
- Description**: A text input field with a note 'Maximum length is 128 characters.'
- Select VMs**: Two radio button options:
 - ☒ Choose from a list of VMs discovered in the selected infrastructure mapping
 - ☐ Import a CSV file with a list of VMs to be migrated

At the bottom right, there are three buttons: 'Cancel', '< Back', and 'Next >'.

3. In the **General** screen, select an infrastructure mapping from the drop-down list.
4. Enter the migration plan **Name** and (optional) **Description**.
5. Select a virtual machine discovery method:
 - **Choose from a list of VMs discovered in the selected infrastructure mapping**
If the virtual machines cannot be discovered, check that the source datastores and networks in the infrastructure mapping are correct.
 - **Import a CSV file with a list of VMs to be migrated**
A CSV file is required for previously migrated source virtual machines and recommended for large migrations.
6. Click **Next**.
7. In the **VMs** screen, select the virtual machines for migration:
 - If you selected **Choose from a list of VMs discovered in the selected infrastructure mapping**, select the virtual machines for migration.
You can search for virtual machines by **VM Name**, **Data Center**, **Cluster**, and **Folder**.
 - If you selected **Import a CSV file with a list of VMs to be migrated**
 - a. Click **Import**.
 - b. Browse to the CSV file and click **Open**.

If the virtual machines cannot be added to the migration plan, check the CSV file format and fields for errors.



NOTE

If the **Create Migration Plan** wizard freezes, refresh the web page, check the CSV file for errors (for example, virtual machines with duplicate **Name** fields and no other fields to distinguish them), and create a new migration plan.

8. Click **Next**.

9. In the **Advanced Options** screen, select the playbook service options:

- a. Select a premigration and/or postmigration playbook service from the dropdown lists.
- b. Select the virtual machines on which to run the playbook services.

10. Click **Next**.

11. In the **Schedule** screen, select a schedule option and click **Create**:

- **Save migration plan to run later**

The migration plan is saved in **Migration Plans Not Started** and will not run unless you [schedule](#) it or click **Migrate** to run the scheduled migration plan immediately.

- **Start migration immediately**

The migration plan may take some time to complete. Progress bars indicate the amount of transferred data, the number of migrated virtual machines, and the elapsed time. You can [cancel a migration plan in progress](#) .

- a. To view the progress of a migration plan, Click **Migration Plans in Progress**
- b. Click a migration plan name to view its details, including the status of the migrating virtual machines.



NOTE

The Migration Plans time counter displays the total time for running the migration plan. The Migration Plan Details time counter displays the time for migrating the virtual machines.

If the server and client clocks are not synchronized, a discrepancy between the migration time counters will appear.

12. In the **Results** screen, click **Close**.

When the migration plan has finished, click **Migration Plans Complete** to view the status of the migration plan. The completed migration plan shows the status of the migrated virtual machines.

In the migration plans list, you can click the **More Actions** icon () to archive, edit, or delete a migration plan.

If a migration fails because of external circumstances (for example, power outage), you can [retry the migration plan](#).

4.3.1. Scheduling a saved migration plan

To schedule a saved migration plan to run in the future:

1. Click **Migration Plans Not Started**
2. Click the **Schedule** button of a migration plan.
3. In the **Schedule Migration Plan** window, select a date and time and click **Schedule**.
The plan's status is **Migration Scheduled** with the date and time.

4.3.2. Canceling a migration plan in progress

To cancel a migration plan in progress:

1. Click **Migration Plans in Progress**
2. Select a migration plan and click **Cancel Migration**.
3. Click **Cancel Migrations** to confirm the cancellation.
The canceled migration appears in **Migration Plans Complete** with a red **x** indicating that the plan did not complete successfully.

4.3.3. Retrying a failed migration plan

To retry a migration plan that failed because of external circumstances (for example, power outage):

1. Delete all objects created by the failed migration plan:
 - Delete newly created virtual machines to avoid name conflicts with migrating VMware virtual machines.
 - Delete converted disks to free up space.
2. Click **Compute** → **Migration** → **Migration Plans**.
3. Click **Migration Plans Complete**.
4. Click the **Retry** button beside the failed migration plan.

4.3.4. Changing the maximum number of concurrent migrations

You can change the maximum number of concurrent migrations for conversion hosts or providers to control the impact of the migration process on your infrastructure.

The provider setting has priority over the conversion host setting. For example, if the maximum number of concurrent migrations is **20** for a provider and **3** for five conversion hosts, the maximum number of concurrent migrations is **20**, not **15** (**5** conversion hosts **x** **3** concurrent migrations per host).

An increase in the maximum number of concurrent migrations affects all migration plans immediately. Virtual machines that are queued to migrate will migrate in greater numbers.

A decrease maximum number of concurrent migrations affects only future migration plans. Migration plans that are in progress will use the limit that was set when the plan was created.

CAUTION

For VDDK transformation, the number of concurrent migrations must not exceed **20**. Otherwise, network overload will cause the migration to fail.

Changing the maximum number of concurrent migrations for all conversion hosts

1. Log in to the CloudForms user interface.
2. Click **Compute** → **Migration** → **Migration Settings**.
3. In the **Migration Throttling** tab, select a value for **Maximum concurrent migrations per conversion host** or **Maximum concurrent migrations per provider** and click **Apply**.
The value of **Maximum concurrent migrations per conversion host** is constrained so that it cannot be greater than **Maximum concurrent migrations per provider**.

Changing the maximum number of concurrent migrations for a specific conversion host

1. Log in to the conversion host using SSH.
2. Obtain the **conversion_host_id**:

```
# curl -sk -u <username>:<password> https://<CloudForms_FQDN>/api/conversion_hosts/
```

1

- 1 Specify the CloudForms FQDN.

3. Enter the following command:

```
# curl -sk -u <username>:<password>  
https://<CloudForms_FQDN>/api/conversion_hosts/<conversion_host_id> -X POST -d  
'{"action": "edit", "resource": {"max_concurrent_tasks": _15_}}'
```

1 2 3 4

- 1 Specify the CloudForms admin username and password.
- 2 Specify the FQDN of the CloudForms machine.
- 3 Specify the **conversion_host_id**.
- 4 Specify the maximum number of concurrent migrations. The default is **10**.

CHAPTER 5. TROUBLESHOOTING

You can review the migration logs, check common issues and mistakes, and known issues to troubleshoot a migration error.

5.1. MIGRATION LOGS

You can check the conversion host logs, playbook logs, and the CloudForms migration log to identify the cause of a migration error.



IMPORTANT

If you need to open a [Red Hat Support call](#), you must submit both the migration (**virt-v2v**) log and **virt-v2v-wrapper** log for analysis.

5.1.1. Downloading the conversion host and playbook logs

You can download the conversion host and playbooks logs in CloudForms.

When disk migration starts, two logs are created in the conversion host:

- **virt-v2v**: Debug output from **virt-v2v** itself. This log tracks the core of the virtual machine migration process, including **libguestfs** traces and disk migration details.
- **virt-v2v-wrapper**: Log of the daemonizing wrapper for **virt-v2v**. This log traces the orchestration of the virtual machine conversion on the conversion host, including disk migration percentages and **virt-v2v** error reporting.

Procedure

1. Log in to the CloudForms user interface.
2. Click **Compute** → **Migration** → **Migration Plans**.
3. Click a completed migration plan to view its details.
4. Click **Download Log** of a virtual machine and select a log:
 - **Premigration log** This option only appears if a premigration playbook is used.
 - **Migration log** The **Migration log** is the **virt-v2v** log.
 - **Virt-v2v-wrapper log**
 - **Postmigration log** This option only appears if a postmigration playbook is used.

5.1.2. Accessing the CloudForms migration log

This log traces the orchestration of the virtual machine migration in CloudForms.

Procedure

1. Log in to the CloudForms machine using SSH.
2. Navigate to `/var/www/miq/vmdb/log/`.

3. View the **automation.log** file.

5.2. COMMON ISSUES AND MISTAKES

5.2.1. Infrastructure mapping errors

- **Networks missing, Datastores missing, and Clusters missing** error messages
If you create an infrastructure mapping and then change a provider or refresh the conversion hosts, the provider's object IDs change. Delete the infrastructure mapping and create a new one.

5.2.2. Migration plan errors

- Virtual machines are being migrated for the first time and are not discovered by the migration plan.
Check that the source datastores and networks appear in the infrastructure mapping.
- Previously migrated virtual machines cannot be discovered by the migration plan.
Use a CSV file to add the virtual machines to the migration plan.
- Virtual machines cannot be added to the migration plan with a CSV file.
Check the CSV file format and fields. Create a new migration plan with the updated CSV file.
- The **Create Migration Plan** wizard hangs while importing a CSV file.
The CSV file is invalid, for example, virtual machines with a duplicate **Name** field and no **Host/Provider** field to distinguish them, or with a duplicate **Name** field and duplicate **Host/Provider** fields. Correct the CSV file, refresh the web page, and create a new migration plan.
- **Unable to migrate VMs because no conversion host was configured at the time of the attempted migration. See the product documentation for information on configuring conversion hosts.**
You can create and save a migration plan whose infrastructure mapping does not contain conversion hosts, but you cannot run the migration plan without conversion hosts. Cancel the migration plan, create the conversion hosts, and run the migration plan again.

5.2.3. IP address errors

If the migrated virtual machine does not have an IP address, check the following:

- Premigration playbook created and added to the migration plan
- VMware Tools installed on the VMware virtual machine

5.2.4. Environment configuration errors

VMware

- A VMware virtual machine cannot be migrated if it has any of the following conditions:
 - Mounted ISO/CDROM disk
 - Invalid name, containing spaces or special characters

- If you are performing more than ten concurrent migrations from a single VMware hypervisor, you must increase the hypervisor's NFC service memory.

Red Hat Virtualization (RHV)

- Name conflict
VMware virtual machine has the same name as a RHV virtual machine.
- MAC address conflict
VMware virtual machine has the same MAC address as a RHV virtual machine in a MAC address pool.
- Check that the RHV conversion host does not have an existing private SSH key in `/var/lib/vdsm/.ssh/id_rsa`. Conversion host configuration does not overwrite old SSH keys. They must be deleted manually.
- SSH transformation only:
 - If you are using SSSD with single sign-on, you must reinstall **ipa-client** without OpenSSH.
 - Check that you enabled SSH access on the VMware hypervisors and correctly configured your conversion hosts for SSH transformation.

5.3. KNOWN ISSUES

- VMware virtual machines with RHEL 8 operating systems cannot be migrated to RHV 4.4. ([BZ#1667478](#)).
- **Networks missing** or **Datastore missing** error messages might appear in the CloudForms user interface when you create an infrastructure mapping in a very large environment. These error messages can occur when the number of records for a particular resource in the CloudForms database exceeds the default number (**1000**) of API results displayed per page. If the mapped resource does not appear in the displayed records, it will be missing from the infrastructure mapping.
You can resolve this issue by increasing the maximum number of API results per page so that all of the records are displayed.

Procedure

1. Log in to the CloudForms user interface.
2. In the header bar, click  (**Configuration**).
3. Click the **Settings** accordion and then click **Zones**.
4. Click the zone in which the EVM server is located and select your EVM server.
5. In the **Advanced** tab, change the value of **max_results_per_page** to **10000**.
6. Click **Save**.

APPENDIX A. CONFIGURING THE RED HAT VIRTUALIZATION ENVIRONMENT FOR SSH TRANSFORMATION

You can configure your Red Hat Virtualization (RHV) environment for SSH transformation if you cannot use VDDK.



NOTE

The default transformation method, VDDK, is much faster than SSH.


This configuration involves adding the following steps to [Chapter 3, *Preparing the migration environment*](#):

Table A.1. Additional configuration for SSH transformation

Section	Additional configuration for SSH transformation
After Section 3.2, "Preparing the VMware environment"	Go to: • Section A.1, "Configuring the VMware hypervisors for SSH transformation" You can collect the SSH keys from the hypervisors at this time, if your security policies allow. The private key of the SSH key pair that is generated in this step will be used in Section A.3, "Configuring the Red Hat Virtualization conversion hosts for SSH transformation".
After Section 3.3.1, "Installing and configuring Red Hat Virtualization"	If the conversion hosts are using SSSD with single sign-on, go to: * Section A.2, "Reinstalling the ipa-client in the Red Hat Virtualization Manager"
Instead of Section 3.4.2, "Configuring the Red Hat Virtualization conversion hosts for VDDK transformation"	Go to: 1. Section A.3, "Configuring the Red Hat Virtualization conversion hosts for SSH transformation" 2. Section A.4, "Copying the VMware SSH keys to the conversion hosts"

A.1. CONFIGURING THE VMWARE HYPERVISORS FOR SSH TRANSFORMATION

For SSH transformation, you must enable SSH access and copy a public SSH key to each VMware hypervisor. The corresponding private key will be used to configure the conversion hosts.



IMPORTANT

A single SSH key pair is recommended because this key pair is used only for virtual machine conversion and it simplifies conversion host management.

If you wish to use a dedicated SSH key pair for each conversion host, you can copy the public key of each conversion host to all the VMware hypervisors.

Procedure

1. Enable SSH access on each VMware hypervisor, according to the VMware documentation:
 - a. In a browser, navigate to [VMware vSphere Documentation](#).
 - b. Enter **Enable ESXi Shell and SSH Access with the Direct Console User Interface** in the **Search** field and select your VMware version.
 - c. Click the **HTML** icon to view the procedure.
You can collect the SSH public keys of the VMware hypervisors at this stage, to copy to the conversion hosts.

2. Generate an SSH key pair without a passphrase:

```
# ssh-keygen -N "
```

3. Copy the public SSH key to **/etc/ssh/keys-root/authorized_keys** on **each** VMware hypervisor.
You will use the private SSH key to configure the conversion hosts.

A.2. REINSTALLING THE IPA-CLIENT IN THE RED HAT VIRTUALIZATION MANAGER

If you are using SSH transformation and configuring your Red Hat Virtualization (RHV) conversion hosts for SSSD with single sign-on, you must reinstall the **ipa-client** in the RHV Manager without the OpenSSH client.

Otherwise, SSH fails for the vdsms user. See [BZ#1544379: ipa-client-install changes system-wide SSH configuration](#) for more information.

This issue cannot be resolved by modifying the configuration file because the file is restored during upgrades.

Procedure

1. Log in to the RHV Manager machine using SSH.
2. Uninstall **ipa-client**:

```
# ipa-client-install --uninstall
```

3. Reinstall **ipa-client** without OpenSSH:

```
# ipa-client-install --no-ssh
```

A.3. CONFIGURING THE RED HAT VIRTUALIZATION CONVERSION HOSTS FOR SSH TRANSFORMATION

You can configure the Red Hat Virtualization (RHV) conversion hosts for SSH transformation in the CloudForms user interface.

Prerequisites

- If the RHV provider has been active for a while, verify that each host has valid subscriptions and repositories by logging in using SSH and running the following commands:

```
# subscription-manager list --consumed
# yum repolist
```

- If a RHV host has an existing SSH private key in `/var/lib/vdsm/.ssh/id_rsa`, delete the key manually before configuring the host. Conversion host configuration does not overwrite existing keys.

Procedure

1. In CloudForms, click **Compute** → **Migration** → **Migration Settings**.
2. In the **Conversion Hosts** tab, click **Configure Conversion Host**. The **Configure Conversion Host** wizard is displayed.

The screenshot shows the 'Configure Conversion Host' wizard interface. At the top, the title bar says 'Configure Conversion Host' with a close button. Below the title bar is a progress bar with four steps: 'Location' (1), 'Host(s)' (2), 'Authentication' (3), and 'Results' (4). The 'Location' step is highlighted with a blue circle. Below the progress bar, there is a label '* Provider Type' followed by a dropdown menu showing '<Choose>'. At the bottom right, there are three buttons: 'Cancel', '< Back', and 'Next >'.

3. In the **Location** screen, select a **Provider Type**.
4. Select a **Provider**.

5. Select a **Cluster** and click **Next**.
6. In the **Host(s)** screen, select one or more hosts from the dropdown list and click **Next**.
7. In the **Authentication** screen, click **Browse** to browse to the Manager's SSH private key or paste it in the **Conversion host SSH private key** field.
The Manager deploys a private SSH key on the conversion hosts in order to send commands and run playbooks. The default key file is `/etc/pki/ovirt-engine/keys/engine_id_rsa` on the Manager machine.
8. Select **SSH** as the **Transformation method**.
9. Click **Browse** to browse to the SSH private key you created for enabling SSH access on the VMware hypervisors or paste it in the **VMware hypervisors SSH private key** field
10. Click **Configure**.
11. In the **Results** screen, wait for the conversion host configuration to finish and click **Close**.
The configured conversion hosts and status information, including error messages, appear in the **Configured Conversion Hosts** list.

If an error occurs, you can download the conversion host configuration log by clicking the **More Actions** icon () and selecting **Download Log**.

You can click **Retry** if the conversion host configuration failed for reasons unconnected with your environment.

A.4. COPYING THE VMWARE SSH KEYS TO THE CONVERSION HOSTS

Copy the SSH public keys of the VMware hypervisors to the conversion hosts.

You can collect the VMware keys either when you configure the VMware hypervisors for SSH transformation or by using **ssh-keyscan**.

A.4.1. Copying keys collected during VMware hypervisor configuration

1. Copy the VMware keys to `/var/lib/vdsm/.ssh/known_hosts` on each conversion host.
2. Verify the SSH connection by connecting to each VMware hypervisor as **vdsm**:

```
$ sudo -u vdsm ssh root@<Vmware_host_name> 1
```

- 1 Specify the host name of your VMware hypervisor.

If the SSH connection fails, check that the VMware hypervisor has SSH access enabled and that you copied the correct keys. Otherwise, all migrations from that hypervisor using SSH transformation will fail.

A.4.2. Copying keys collected with **ssh-keyscan**

You must run **ssh-keyscan** for **each VMware hypervisor**. Otherwise your conversion hosts will not have all the VMware hypervisor keys and the migration will fail.

Perform the following procedure on each conversion host:

1. Run **ssh-keyscan** for each VMware hypervisor and copy its public key to **known_hosts**, as in the following example:

```
$ ssh-keyscan <Vmware_host_1_ip> | sudo tee -a /var/lib/vdsm/.ssh/known_hosts ❶
$ ssh-keyscan <Vmware_host_2_ip> | sudo tee -a /var/lib/vdsm/.ssh/known_hosts
$ ssh-keyscan <Vmware_host_3_ip> | sudo tee -a /var/lib/vdsm/.ssh/known_hosts
```

- ❶ Specify the IP address, not the host name, of each VMware hypervisor.

2. Change the ownership of the **known_hosts** file to **vdsm** user and **kvm** group:

```
$ chown 36:36 /var/lib/vdsm/.ssh/known_hosts
```

3. Verify the SSH connection by connecting to each VMware hypervisor as **vdsm**:

```
$ sudo -u vdsd ssh root@<Vmware_host_name> ❶
```

- ❶ Specify the host name of the VMware hypervisor.

If the SSH connection fails, check that the VMware hypervisor has SSH access enabled and that you copied the correct keys. Otherwise, all migrations from that hypervisor using SSH transformation will fail.

A.5. CONFIGURING SECURE REMOTE LOGIN TO THE VMWARE HYPERVISORS

You can configure secure remote login to the VMware hypervisors by using **ssh-agent** and **ssh-add**.

Secure remote login must be verified for **each** VMware hypervisor. If secure remote login fails, all migrations from that hypervisor will fail.

Procedure

1. On the Manager machine, create an **ssh-agent** session for the **vdsm** user:

```
$ sudo -u vdsd ssh-agent
SSH_AUTH_SOCK=<ssh_auth_sock>; export SSH_AUTH_SOCK;
SSH_AGENT_PID=139150; export SSH_AGENT_PID;
echo Agent pid 139150;
```

2. Copy the **<ssh_auth_sock>** value from the output.
3. Run **ssh-add** to authorize the **vdsm** user's private key for the **ssh-agent** session:

```
$ sudo -u vdsd SSH_AUTH_SOCK=<ssh_auth_sock> ssh-add ❶
```

- ❶ Specify the **<ssh_auth_sock>** value.

4. Connect to a VMware hypervisor to verify the secure remote login:

```
$ sudo -u vdsmd \
  SSH_AUTH_SOCK=<ssh_auth_sock> ssh root@<Vmware_host_name> 1 2
```

- 1 Specify the **<ssh_auth_sock>** value.
- 2 Specify the host name of the VMware hypervisor.

PART II. MIGRATING FROM VMWARE TO RED HAT OPENSTACK PLATFORM


This guide describes how to plan your migration, to prepare the VMware and Red Hat OpenStack Platform environments, and to migrate your VMware virtual machines.

CHAPTER 6. UNDERSTANDING THE MIGRATION

6.1. UNDERSTANDING THE MIGRATION PROCESS

This workflow describes the process of migrating VMware virtual machines to Red Hat OpenStack Platform (RHOSP).

Figure 6.1. VMware to RHOSP migration workflow

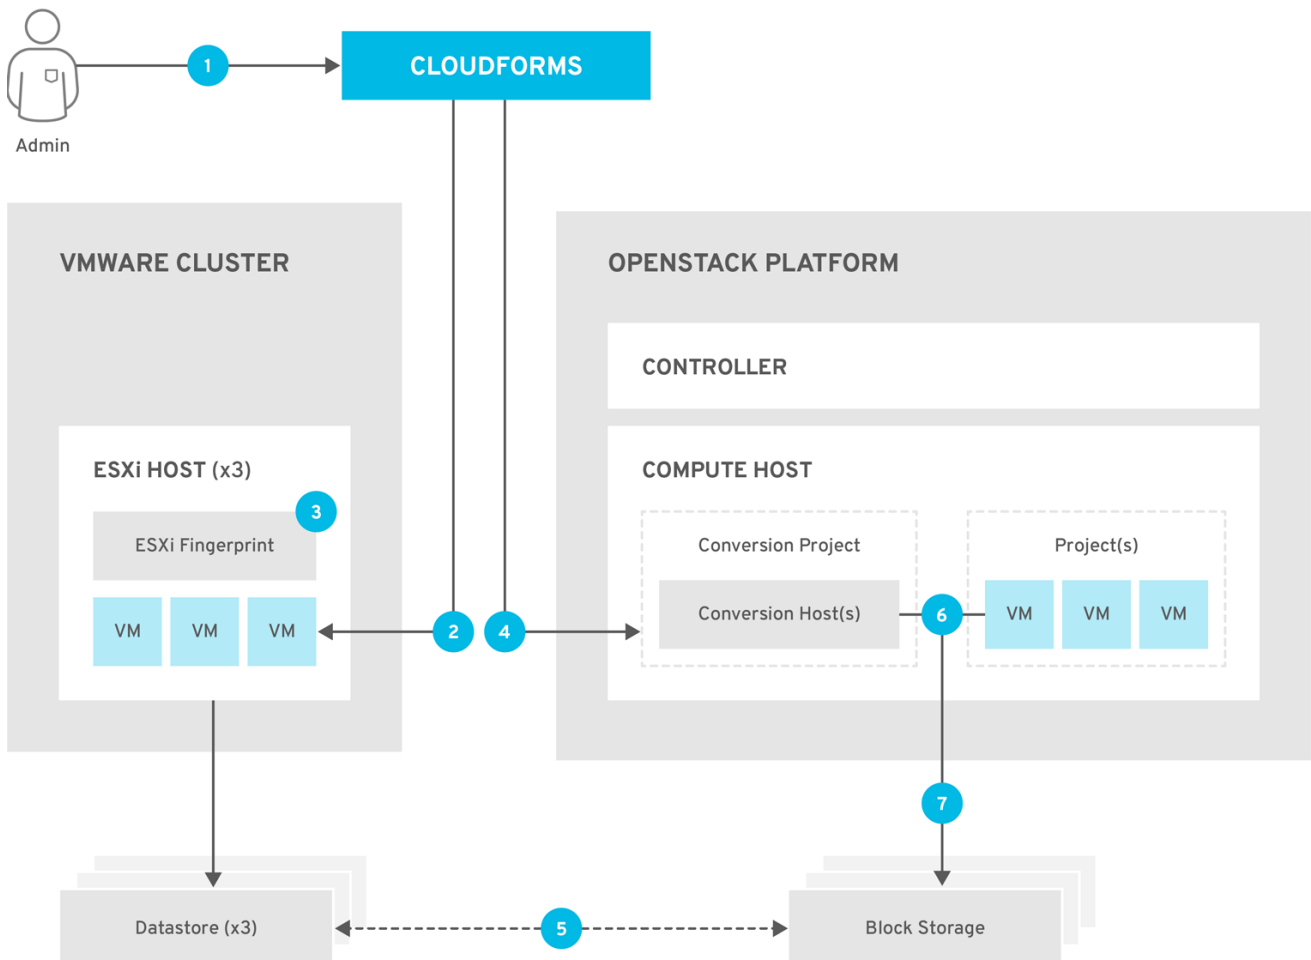

CLOUDFORMS_474716_0718

- 1 You create and run a migration plan in the CloudForms user interface.
- 2 CloudForms uses the migration plan to locate the VMware virtual machines.
- 3 CloudForms captures the VMware ESXi host fingerprint for authentication during the migration process.
- 4 CloudForms initiates communication with the RHOSP conversion hosts. RHOSP conversion hosts are RHOSP instances with **virt-v2v** and **virt-v2v-wrapper** installed.
- 5 The **virt-v2v-wrapper** connects to the VMware datastore through the ESXi host. **virt-v2v** streams the VMware virtual disks to the Red Hat data domain and converts the disks.

6

After the VMware virtual disks are converted, **virt-v2v** detaches the volumes from the RHOSP conversion host, migrates the volumes to the RHOSP project, and creates the network ports defined in the infrastructure mapping.

7

virt-v2v-wrapper creates a RHOSP instance with the flavor and security group defined in the migration plan. **virt-v2v** attaches the newly created network ports and the disks mapped in the block storage to the instance. The instance is powered on.

The migration process is complete and the migration plan status is displayed in the CloudForms user interface.

6.2. MIGRATION NETWORK REQUIREMENTS

The network communication between the VMware environment, the Red Hat environment, the conversion hosts, and CloudForms must be uninterrupted and reliable.

The firewall rules must enable the following ports for migration.

Table 6.1. Firewall rules for migration

Port	Protocol	Source	Destination
22	TCP	CloudForms	Conversion hosts
443	TCP	CloudForms	VMware ESXi hosts
902	TCP	CloudForms	VMware ESXi hosts
902	TCP	Conversion hosts	VMware ESXi hosts
5480	TCP	Conversion hosts	VMware vCenter



NOTE

All outbound traffic is enabled by default. If you have changed this setting, check that ports 902 and 5480 are enabled in the security groups.

CHAPTER 7. PLANNING THE MIGRATION

This section provides guidelines for planning your migration.

7.1. QUESTIONS TO ASK BEFORE MIGRATION

The following questions can help you to estimate the resources and time required for migration.

What am I migrating?

- Identify the VMware virtual machines that you will be migrating.

What am I missing?

- Identify resource gaps, such as bandwidth, storage, licenses, or a suitable maintenance window, before you begin the migration.

What is the maximum number of disks or virtual machines that I can migrate?

- There is no maximum number of disks or virtual machines that you can migrate. However, you may not want to migrate all your virtual machines at the same time, in order to minimize the impact on your users.



IMPORTANT

If you exceed the capabilities of your environment, the migration will fail. This situation could affect existing applications running on virtual machines attached to the network and storage.

What impact will the migration have on my users?

- Assess the effects the migration may have on a production environment. It may be possible to migrate your applications in phases, without downtime at the application layer, if the applications are distributed in a high-availability architecture.
- Check whether users will lose access to critical applications.

7.1.1. How long will the migration take?

There is no formula to estimate how long the actual migration will take. Migration speed is determined by your hardware, network speed, and other factors.

The following example is provided as a guide:

Example 7.1. Migration to Red Hat OpenStack Platform 14

Duration: 133 minutes

Environment:

- 20 virtual machines, with 1000 GB total data
- Two conversion hosts, with a maximum of ten concurrent migrations each

- Bare metal host with 40 cores and 500 GB RAM
- SSD storage
- iSCSI interface between VMware hosts and storage
- Fiber Channel interface with multipath access between Red Hat hosts and storage
- 10 GbE NICs

7.1.2. What operating systems can I migrate?

You can migrate any guest operating system that is [certified and supported](#).

7.1.3. How many conversion hosts do I need?

The number of conversion hosts you create depends on the size of your migration. All the virtual machines in a migration plan are migrated at the same time, in parallel. The number of virtual machines that you can migrate simultaneously depends on your infrastructure capabilities. Each migration requires a certain amount of network bandwidth, I/O throughput, and processing power for the conversion process.

Multiple conversion hosts provide load-balancing and better performance, even for small migrations.

Conversion hosts are limited to a maximum of ten concurrent migrations, unless you change the default values.

You should test your environment thoroughly before the migration to determine how many migrations it can support without negative effects, for example, five conversion hosts, each running ten concurrent migrations.

7.1.4. Should I migrate my virtual machines with VDDK or with SSH?

You can migrate your virtual machines with either the VMware Virtual Disk Development Kit (VDDK) or SSH. VDDK is the default because it is much faster than SSH and easier to configure.

VDDK is limited to 20 concurrent migrations per conversion host, because of network limitations, and 10 concurrent migrations per VMware hypervisor, unless you increase the hypervisor's NFC service memory.

If you cannot use VDDK, SSH is a fallback option.

7.2. OPTIMIZING PERFORMANCE FOR MIGRATION

You can minimize the impact of the migration on your environment and improve performance.

For details on performance-related configurations, see [Performance recommendations for migrating from VMware to Red Hat Virtualization or Red Hat OpenStack Platform with IMS](#).

7.2.1. Optimizing the migration environment

You can configure the VMware and Red Hat environments to optimize your migration.

VMware environment

You can improve performance with the following configurations:

- Extend the VMware virtual machine network to the Red Hat environment.
- Ensure that the VMware network provides high throughput.
VMware and Red Hat hosts often have multiple network interfaces. By default, the conversion hosts use the VMware hosts' admin interface to import virtual machines. Configure your routing for the fastest possible connection between the VMware and Red Hat environment. You can use host routes or IP table filtering to control the traffic flow.
- Ensure that the VMware network does not affect production machines, for example, by using a backup network to avoid overload.
- Divide the VMware virtual machines equally between two VMware hosts, if possible.
- Remove unnecessary data from the VMware disks.

Red Hat environment

You can improve performance with the following configurations:

- Update your Red Hat environment to the latest z-stream release and install required patches.
- Use fast, full SSD storage.
- Ensure that the network connection between the bare metal hosts and storage is at least 10 GbE.
- Use Fibre Channel interfaces between the hosts and storage.
- Configure multipath access between the hosts and storage.

7.2.2. Optimizing conversion host performance

You can improve performance with the following conversion host configurations:

- Deploy the conversion hosts on dedicated, midrange or high-end bare metal hosts, with at least 10 GB of available RAM and 4 CPUs.
If you increase the maximum number of concurrent migrations beyond **10** (up to **20** concurrent migrations), add 1 GB RAM for each additional migration.



NOTE

If you increase the maximum number of concurrent migrations, you must perform test migrations to assess the capabilities of your environment's infrastructure and to ensure that the actual migration does not fail.

- Deploy the conversion host instances with at least 10 GB of available RAM and 4 CPUs.
If you increase the maximum number of concurrent migrations beyond **10** (up to **20** concurrent migrations), add 1 GB RAM for each additional migration.



NOTE

If you increase the maximum number of concurrent migrations, you must perform test migrations to assess the capabilities of your environment's infrastructure and to ensure that the actual migration does not fail.

- Deploy the conversion hosts on dedicated bare metal hosts.
- Ensure that the virtual machines on those hosts have low storage input/output usage.
- Enable nested virtualization for the compute nodes on which the conversion hosts are deployed.
- Deploy multiple conversion hosts (up to 5) for load-balancing and improved performance. The virtual machines in a migration plan are automatically distributed among the conversion hosts. This decreases the load on the conversion hosts and allows you to increase the concurrent migrations beyond the limits of a single conversion host.

7.2.3. Scheduling the migration

You can improve performance and minimize the impact on your users by scheduling the migration carefully:

- Prepare your users for downtime.
Currently, IMS supports only cold migration. Virtual machines are powered off gracefully as part of the migration process.
- Stagger the migration schedules.
- Move critical applications during maintenance windows.
- Schedule the migration when storage input/output usage is low.
- Create multiple migration plans for finer control.

7.2.4. Grouping virtual machines for migration

You can improve performance and minimize the impact on your users by creating migration groups of virtual machines:

- Create migration groups for your virtual machines, so that you are not migrating all of them at the same time.
- Migrate virtual machines as a group, rather than individually.
You can deploy up to 5 conversion hosts, with each host migrating up to 20 virtual machines concurrently. **These limits should not be exceeded.**
- Consider the following questions when creating migration groups:
 - How are the virtual machines grouped now?
 - Which virtual machines should be migrated together?
 - Which workloads or linked applications should be migrated together?
 - What applications must remain available?
- Consider which parts of the workload to migrate first:
 - Databases
 - Applications
 - Web servers

- Load balancers

CHAPTER 8. PREPARING THE MIGRATION ENVIRONMENT

You can prepare the VMware and Red Hat environments for migration.

8.1. SOFTWARE COMPATIBILITY

Ensure that your software versions are compatible.

Software	Version
VMware	6.0 or later
VMware Virtual Disk Development Kit (VDDK)	- VMware 6.0 and 6.5: VDDK 6.5 - VMware 6.7: VDDK 6.7 - VMware 7.0: VDDK 7.0
Red Hat CloudForms	5.0
Red Hat OpenStack Platform	13 or 16
RHOSP V2V Image for Red Hat OpenStack Director	14.0.4

8.2. PREPARING THE VMWARE ENVIRONMENT

You can prepare the VMware network and virtual machines for migration.

If you are performing more than ten concurrent migrations from a single VMware hypervisor, you must configure the hypervisor.

8.2.1. Preparing the VMware network

You can prepare the VMware network for migration:

- Ensure that IP addresses, VLANs, and other network configuration settings are not changed before or after migration. The migration process preserves the VMware virtual machines' MAC addresses.



NOTE

See [Section 6.2, “Migration network requirements”](#) for firewall rules.

8.2.2. Preparing the VMware virtual machines

You can prepare the VMware virtual machines for migration.

Procedure

- Download and install [VMware Tools](#) to preserve the IP addresses.

2. Unmount mounted ISO/CDROM disks.
3. Ensure that each NIC has no more than one IPv4 and/or one IPv6 address.
4. Ensure that the virtual machine names contain only upper- or lower-case letters, numbers, underscores (`_`), hyphens (`-`), or periods (`.`).
5. Ensure that the VMware virtual machine names do not duplicate names of virtual machines in the Red Hat OpenStack Platform tenant.

8.2.3. Configuring a VMware hypervisor for more than 10 concurrent migrations

If you are performing more than 10 concurrent migrations from a VMware hypervisor using VDDK transformation, the migration will fail because the hypervisor's NFC service memory buffer is limited to 10 parallel connections. See [VMware Virtual Disk Programming Guide NFC session connection limits](#) and [Virt-v2v. VDDK: ESXi NFC service memory limits](#) for details.

You can increase the hypervisor's NFC service memory to enable additional connections for migrations.

Procedure

1. Log in to a VMware hypervisor as root.
2. Change the value of **maxMemory** to **1000000000** in **/etc/vmware/hostd/config.xml**:

```
...
    <nfcsvc>
      <path>libnfcsvc.so</path>
      <enabled>true</enabled>
      <maxMemory>1000000000</maxMemory>
      <maxStreamMemory>10485760</maxStreamMemory>
    </nfcsvc>
...
```

3. Restart **hostd**:

```
# /etc/init.d/hostd restart
```

You do not need to reboot the VMware hypervisor.

8.3. INSTALLING AND CONFIGURING THE RED HAT ENVIRONMENT

You can install and configure Red Hat OpenStack Platform and one or more CloudForms appliances for migration.

8.3.1. Installing and configuring Red Hat OpenStack Platform

You can install and configure your Red Hat OpenStack Platform 13 and 16.1.

Prerequisites

1. Set the BIOS settings of the bare metal hosts for optimal performance, rather than power-saving, according to the vendor's recommendations.

2. Disable CPU enhanced halt (C1E) in the BIOS settings, if applicable.
3. Check the firewall and security group rules to ensure that the ports required for migration are open.

Procedure


You can install and configure Red Hat OpenStack Platform (RHOSP) for migration.

Prerequisites

1. Set the BIOS settings of bare metal hosts for optimal performance, rather than power-saving, according to the vendor's recommendations.
2. Disable CPU enhanced halt (C1E) in the BIOS settings, if applicable.
3. Check the firewall and security group rules to ensure that the ports required for migration are open.

Procedure

1. Install [Red Hat OpenStack Platform](#).
2. [Create provider networks](#) for the target instances to preserve the IP addresses of the source virtual machines.
3. [Create a project](#) for the conversion hosts and any target projects you require for the target instances.
4. [Ensure that the admin user has member and admin roles](#) in the conversion host and target projects.
5. [Create a volume](#) and [set at least one volume type](#) for the target block storage. Otherwise, CloudForms will not detect the storage when you create the infrastructure mapping.
6. Ensure that the storage backends have sufficient space for the migrated virtual machines.



IMPORTANT

If you are using Red Hat Ceph Storage, you will require three times the space of the source virtual machines for the migrated virtual machines. A Ceph storage cluster, by default, [creates two copies of an object in a replicated storage pool](#), for a total of three copies.

The migrated disks use all of the space because it is preallocated. For example, a source virtual machine with a 100 GB disk requires 300 GB of storage, regardless of how much data the disk actually contains. To save storage space, you can use the **fstrim** command on the migrated virtual machines as a postmigration task or playbook.

7. Create flavors for the source virtual machines. If you do not create custom flavors, CloudForms will try to map each source virtual machine to an existing flavor.

8.3.2. Configuring an existing Red Hat OpenStack Platform environment

If you are migrating to an existing Red Hat OpenStack Platform (RHOSP) environment, check the following:

- When you add the RHOSP provider to CloudForms, you must wait for CloudForms to update its event history before attempting to use the provider.
You can check the [cloud provider timeline](#) to verify that all events have been processed.

8.3.3. Installing and configuring Red Hat CloudForms

You can install and configure Red Hat CloudForms for migration.

If you change or remove a provider in CloudForms, your infrastructure mappings or migration plans will have errors. You must delete and re-create the infrastructure mappings or migration plans.

Procedure

1. Install [CloudForms 5.0](#) on Red Hat OpenStack Platform (RHOSP).
2. [Add VMware vCenter to CloudForms](#) as an infrastructure provider.
3. [Authenticate the VMware vCenter hosts](#).
4. [Add Red Hat OpenStack Platform to CloudForms](#) as a cloud provider.
Do not complete the fields in the **RSA key pair** tab. You will add the SSH private key when you configure the conversion hosts.
5. If the RHOSP provider has been active for a while, you must wait for CloudForms to update its event history before attempting to use the provider. You can check the [cloud provider timeline](#) to verify that all events have been processed.
6. Click **Compute** → **Infrastructure** → **Providers** to verify that CloudForms can access the providers and hosts.
7. Synchronize the server and client clocks, if possible, to ensure that migration time counters are aligned.

8.3.4. Installing and configuring Red Hat CloudForms in a distributed environment

You can install Red Hat CloudForms in a distributed environment, with appliances on your user interface, database, and worker machines.



NOTE

If you create an infrastructure mapping or migration plan and then remove or change a provider in CloudForms, the mapping or plan must be deleted and re-created.

Procedure

1. Install Red Hat CloudForms on [Red Hat OpenStack Platform \(RHOSP\)](#) or [VMware](#).
2. [Configure the worker appliances](#), if necessary.
3. [Enable the required server roles](#) in the CloudForms user interface:
 - Database: No server roles required

- User interface:
 - Database Operations
 - User Interface
 - Web Services
 - Worker:
 - Automation Engine
 - Capacity & Utilization Coordinator
 - Capacity & Utilization Data Collector
 - Capacity & Utilization Data Processor
 - Database Operations
 - Event Monitor
 - Provider Inventory
 - Provider Operations
 - Reporting
 - Scheduler
 - SmartState Analysis
 - Web Services
4. [Add VMware to CloudForms](#) as an infrastructure provider.
 5. [Authenticate the VMware vCenter hosts](#).
 6. [Add RHOSP to CloudForms](#) as a cloud provider.
Do not complete the fields in the **RSA key pair** tab. You will add the SSH private key when you configure the conversion hosts.
 7. If the RHOSP provider has been active for a while, you must wait for CloudForms to update its event history before attempting to use the provider. Check the [cloud provider timeline](#) to verify that all events have been processed.
 8. Click **Compute → Infrastructure → Providers** to verify that CloudForms can access the providers and hosts.
 9. Configure the [Capacity and Utilization Collection Settings](#) of the CloudForms worker appliances to collect data from the VMware and Red Hat providers.

8.4. CREATING AND CONFIGURING THE RED HAT OPENSTACK PLATFORM CONVERSION HOSTS

You can create the Red Hat OpenStack Platform conversion hosts with the conversion appliance.

8.4.1. Creating a Red Hat OpenStack Platform conversion host

You can create a Red Hat OpenStack Platform conversion host with the conversion appliance. The number of conversion hosts you deploy depends on your migration size and infrastructure capabilities.



NOTE

For optimal performance, deploy the conversion hosts on compute nodes with [nested virtualization enabled](#). Nested virtualization is a technology preview.

Procedure

1. Log in to Red Hat OpenStack Platform.
2. [Upload the V2V image](#) to the OpenStack Image Service.
3. [Launch the conversion host instance](#), specifying the following options:
 - **Instance Boot Source:** V2V image
 - **Resources:**
 - 4 vCPUs
 - 10 GB RAM, if you use the default maximum number of concurrent migrations per conversion host, which is **10**. If you increase the number of concurrent migrations, you must add 1 GB RAM for each additional concurrent migration. If you reduce the number, you can reduce the RAM but the conversion host cannot have less than 8 GB RAM.
 - **/tmp** (10 GB, or 1 GB for each concurrent migration)
 - **/var/tmp** (10 GB, or 1 GB for each concurrent migration)
 - **/var/logs** (5 GB)
4. [Resize the conversion host instance](#) to accommodate its file system.
 The conversion host instance is created from an image, but the disk space defined in the image is not sufficient. You can either extend the partition (and subsequently, extend the physical volume in the volume group) to the required size or you can create a new partition and add it as a physical volume to the volume group.



NOTE

You must resize **lv_root** to use all available disk space because the image will not use it by default.


8.4.2. Downloading the VMware Virtual Disk Development Kit

You can download the VMware Virtual Disk Development Kit (VDDK).

Procedure

1. In a browser, navigate to the [VMware {code}](#) site and click **SDKS**.
2. Click **Virtual Disk Development Kit (VDDK)**

3. Select the VDDK release specified for your VMware version.
4. Click **Download** and log in with your VMware account credentials.
5. Save the VDDK archive file and record its path.



NOTE

See [Section 8.1, “Software compatibility”](#) for the required VDDK version.

8.4.3. Configuring the Red Hat OpenStack Platform conversion hosts for VDDK transformation

You can configure the Red Hat OpenStack Platform (RHOSP) conversion hosts for VDDK transformation in the CloudForms user interface.

Procedure

1. In CloudForms, click **Compute** → **Migration** → **Migration Settings**.
2. In the **Conversion Hosts** tab, click **Configure Conversion Host**. The **Configure Conversion Host** wizard is displayed.

Configure Conversion Host

Location Host(s) Authentication Results

1 2 3 4

* Provider Type <Choose>

Cancel < Back Next >

3. In the **Location** screen, select a **Provider Type**.
4. Select a **Provider**.
5. Select a **Project** and click **Next**.

6. In the **Host(s)** screen, select one or more hosts from the dropdown list and click **Next**.
7. In the **Authentication** screen, click **Browse** to browse to the SSH private key of the SSH key pair that you used when you created the conversion host or paste the key in the **Conversion host SSH private key** field.
CloudForms uses this private SSH key to connect to the conversion host.
8. Select **VDDK** as the **Transformation method**.
9. Enter the path of the VDDK package in the **VDDK library path** field.
10. Click **Configure**.
11. In the **Results** screen, wait for the conversion host configuration to finish and click **Close**.
The configured conversion hosts and status information, including error messages, appear in the **Configured Conversion Hosts** list.

If an error occurs, you can download the conversion host configuration log by clicking the **More Actions** icon () and selecting **Download Log**.

You can click **Retry** if the conversion host configuration failed for reasons unconnected with your environment.

8.4.4. Verifying the conversion hosts

You can verify your conversion hosts by using the CloudForms API.

Procedure

1. Verify the conversion hosts:

```
$ curl -s -k -u <user>:<password> 'https://<CloudForms_FQDN>/api/conversion_hosts' 1
```

- 1 Specify your CloudForms user name, password, and FQDN.

The conversion host IDs appear at the end of the **resources** URL, after **/api/conversion_hosts/**:

```
{
  "name": "conversion_hosts",
  ...
  "resources": [{"href": "https://<CloudForms_FQDN>/api/conversion_hosts/10000000000001"},
    {"href": "https://<CloudForms_FQDN>/api/conversion_hosts/10000000000002"},
    {"href": "https://<CloudForms_FQDN>/api/conversion_hosts/10000000000003"}],
  ...
}
```

CHAPTER 9. MIGRATING THE VIRTUAL MACHINES

You can create an infrastructure mapping in the CloudForms user interface. You then create and run a migration plan.

Optionally, you can [change the maximum number of concurrent migrations for conversion hosts or providers](#) to control the migration process.

9.1. MIGRATION PREREQUISITES

This section describes the migration prerequisites.

9.1.1. Enabling Ansible in CloudForms

You must enable Ansible in CloudForms in order to run premigration playbooks to preserve the IP addresses of migrated virtual machines.

You can also create Ansible playbooks to run postmigration playbooks to clean up your environment.

Procedure

1. Log in to the CloudForms user interface.
2. [Enable the **Embedded Ansible** server role.](#)
3. [Add an Ansible playbook repository .](#)
4. [Add the credentials](#) of each virtual machine that you are migrating.
5. [Add your playbook as an Ansible service catalog item .](#)

You will select the playbooks and the virtual machines on which they run when you create the migration plan.

9.1.1.1. Creating a premigration playbook for Windows virtual machines

You must create a premigration playbook to preserve the IP address of Windows virtual machines.

See [Static IP is not getting assigned to the Windows guest after the migration from VMware to RHV](#) for details.

9.1.1.2. Creating a premigration playbook for Linux virtual machines

You must create a premigration playbook to preserve the IP address of RHEL and other Linux virtual machines.

Prerequisites

- The **rhel-<version>-server-rpms** repository must be enabled for the VMware virtual machines. If you have disabled it, you can re-enable it in the premigration playbook.

Procedure

1. [Install the **ims.rhel_premigration** role](#) with Ansible Galaxy.


2. Create a **RHEL premigration** playbook according to the following example:

```
---
- hosts: <hosts> 1
  vars:
    rhsm_repositories:
      - "rhel-<version>-server-rpms"
  roles:
    - role: ims.rhel_pre_migration
```

- 1** Specify the VMware hosts on which you are running this playbook.

9.1.2. Creating a CSV file to add virtual machines to the migration plan

If you are migrating virtual machines that were migrated in the past, you must add the virtual machines to the migration plan with a CSV file, because the migration plan cannot discover them automatically.



NOTE

A CSV file is optional, but recommended, for large migrations because it is faster than manually selecting the security group and flavor of each virtual machine.

Table 9.1. CSV file fields

Field	Comments
Name	Virtual machine name. Required
Host	Optional. Only required if virtual machines have identical Name fields.
Provider	Optional. Only required if virtual machines have identical Name and Host fields.
Security Group	Optional. The default is Default .
Flavor	Optional If you do not create flavors for the migration or if you leave this field blank, CloudForms tries to map the source virtual machines to existing flavors.

CSV file example

```
Name,Host,Provider,Security Group,Flavor
vm01,host1,vSphere3,webserver,x1.medium
vm02,host1,vSphere3,webserver,x1.medium
vm03,host1,vSphere3,webserver,x1.medium
```

9.2. CREATING AN INFRASTRUCTURE MAPPING

The infrastructure mapping maps the resources of your VMware and Red Hat environments.



IMPORTANT

If you add or remove providers or provider objects from an infrastructure mapping, the mapping will have missing resource errors. You must delete the infrastructure mapping and create a new one.

Procedure

1. Click **Compute** → **Migration** → **Infrastructure Mappings**.
2. Click **Create Infrastructure Mapping**. The **Create Infrastructure Mapping** wizard is displayed.

Create Infrastructure Mapping

General Map Compute Map Storage Map Networks Results

1 2 3 4 5

Name *
Maximum length is 24 characters.

Description
Maximum length is 128 characters.

Target Provider

Cancel < Back Next >

3. In the **General** screen, enter the infrastructure mapping name and (optional) description.
4. Select the **Target Provider** and click **Next**.
5. In the **Map Compute** screen, select a **Source Provider \ Datacenter \ Clustersource** cluster and a **Target Provider \ Project**.
If the target project does not contain a conversion host, a warning icon () appears. You can create and save an infrastructure mapping, but you must configure the conversion hosts before running a migration plan.
6. Click **Add Mapping**. You can map additional projects.
7. Click **Next**.

8. In the **Map Storage** screen, select a **Source Provider \ Datacenter \ Datastore** and **Target Provider \ Volume Type**.
If the volume type is missing, check that the volume type has been set. Block storage requires at least one volume type. See [Create a Volume](#) and [Changing a Volume's Type \(Volume Re-typing\)](#) in the *Red Hat OpenStack Platform Storage Guide*.
9. Click **Add Mapping**. You can map additional datastores.
10. Click **Next**.
11. In the **Map Networks** screen, select a source cluster.
12. Select one or more networks from **Source Provider \ Datacenter \ Network** and **Target Project \ Network**.
IMS supports both provider and tenant networks.
13. Click **Add Mapping**. You can map the networks of additional source clusters.
14. Click **Create**.
15. Click **Close**. The infrastructure mapping is saved in **Compute → Migration → Infrastructure Mappings**.

You can click an infrastructure mapping element to view its details:

Infrastructure Mappings list

9.3. CREATING AND RUNNING A MIGRATION PLAN

Before attempting a large migration, you should perform several test migrations with different maximum numbers of concurrent migrations for your conversion hosts or providers. This will enable you to assess the capabilities of your environment's infrastructure.



NOTE

A CSV file is optional, but recommended, for large migrations because it is faster than manually selecting the security group and flavor of each virtual machine.

Procedure

1. Click **Compute → Migration → Migration Plans**.

- Click **Create Migration Plan**. The **Create Migration Plan** wizard is displayed.

The screenshot shows the 'Create Migration Plan' wizard with five steps: General (1), VMs (2), Advanced Options (3), Schedule (4), and Results (5). The 'General' tab is active. It contains the following fields and options:

- Infrastructure Mapping ***: A dropdown menu with '<Choose>' selected.
- Name ***: A text input field with a note 'Maximum length is 24 characters.'
- Description**: A text input field with a note 'Maximum length is 128 characters.'
- Select VMs**: Two radio button options:
 - ☒ **Choose from a list of VMs discovered in the selected infrastructure mapping**
 - ☐ **Import a CSV file with a list of VMs to be migrated**

At the bottom right, there are three buttons: 'Cancel', '< Back', and 'Next >'.

- In the **General** screen, select an infrastructure mapping from the drop-down list.
- Enter the migration plan **Name** and (optional) **Description**.
- Select a virtual machine discovery method:
 - **Choose from a list of VMs discovered in the selected infrastructure mapping**
If the virtual machines cannot be discovered, check that the source datastores and networks in the infrastructure mapping are correct.
 - **Import a CSV file with a list of VMs to be migrated**
A CSV file is required for previously migrated source virtual machines and recommended for large migrations.
- Click **Next**.
- In the **VMs** screen, select the virtual machines for migration:
 - If you selected **Choose from a list of VMs discovered in the selected infrastructure mapping**, select the virtual machines for migration.
You can search for virtual machines by **VM Name**, **Data Center**, **Cluster**, and **Folder**.
 - If you selected **Import a CSV file with a list of VMs to be migrated**
 - Click **Import**.

- b. Browse to the CSV file and click **Open**.

If the virtual machines cannot be added to the migration plan, check the CSV file format and fields for errors.



NOTE

If the **Create Migration Plan** wizard freezes, refresh the web page, check the CSV file for errors (for example, virtual machines with duplicate **Name** fields and no other fields to distinguish them), and create a new migration plan.

8. Click **Next**.

9. In the **Instance Properties** screen, click the pencil icon to edit the network or flavor of each selected virtual machine.

Flavors that are too small for the virtual machine are marked with an asterisk (*). If you have not created flavors for the migration, CloudForms tries to map the source virtual machines to existing flavors.

10. Click **Next**.

11. In the **Advanced Options** screen, select the playbook service options:

- a. Select a premigration and/or postmigration playbook service from the dropdown lists.
- b. Select the virtual machines on which to run the playbook services.

12. Click **Next**.

13. In the **Schedule** screen, select a schedule option and click **Create**:

- **Save migration plan to run later**

The migration plan is saved in **Migration Plans Not Started** and will not run unless you [schedule](#) it or click **Migrate** to run the scheduled migration plan immediately.

- **Start migration immediately**

The migration plan may take some time to complete. Progress bars indicate the amount of transferred data, the number of migrated virtual machines, and the elapsed time. You can [cancel a migration plan in progress](#).

- a. To view the progress of a migration plan, Click **Migration Plans in Progress**
- b. Click a migration plan name to view its details, including the status of the migrating virtual machines.



NOTE

The Migration Plans time counter displays the total time for running the migration plan. The Migration Plan Details time counter displays the time for migrating the virtual machines.

If the server and client clocks are not synchronized, a discrepancy between the migration time counters will appear.

14. In the **Results** screen, click **Close**.

When the migration plan has finished, click **Migration Plans Complete** to view the status of the migration plan. The completed migration plan shows the status of the migrated virtual machines.

In the migration plans list, you can click the **More Actions** icon () to archive, edit, or delete a migration plan.

If a migration fails because of external circumstances (for example, power outage), you can [retry the migration plan](#).

9.3.1. Scheduling a saved migration plan

To schedule a saved migration plan to run in the future:

1. Click **Migration Plans Not Started**
2. Click the **Schedule** button of a migration plan.
3. In the **Schedule Migration Plan** window, select a date and time and click **Schedule**.
The plan's status is **Migration Scheduled** with the date and time.

9.3.2. Canceling a migration plan in progress

To cancel a migration plan in progress:

1. Click **Migration Plans in Progress**
2. Select a migration plan and click **Cancel Migration**.
3. Click **Cancel Migrations** to confirm the cancellation.
The canceled migration appears in **Migration Plans Complete** with a red **x** indicating that the plan did not complete successfully.

9.3.3. Retrying a failed migration plan

To retry a migration plan that failed because of external circumstances (for example, power outage):

1. Delete all objects created by the failed migration plan:
 - Delete newly created instances to avoid name conflicts with migrating VMware virtual machines.
 - Delete network ports of failed instances.
2. Click **Compute** → **Migration** → **Migration Plans**.
3. Click **Migration Plans Complete**.
4. Click the **Retry** button beside the failed migration plan.

9.3.4. Changing the maximum number of concurrent migrations

You can change the maximum number of concurrent migrations for conversion hosts or providers to control the impact of the migration process on your infrastructure.

The provider setting has priority over the conversion host setting. For example, if the maximum number of concurrent migrations is **20** for a provider and **3** for five conversion hosts, the maximum number of concurrent migrations is **20**, not **15** (**5** conversion hosts **x** **3** concurrent migrations per host).

An increase in the maximum number of concurrent migrations affects all migration plans immediately. Virtual machines that are queued to migrate will migrate in greater numbers.

A decrease maximum number of concurrent migrations affects only future migration plans. Migration plans that are in progress will use the limit that was set when the plan was created.

CAUTION

Red Hat OpenStack Platform conversion hosts require an additional 1 GB RAM for each additional concurrent migration above **10**.

For VDDK transformation, the number of concurrent migrations must not exceed **20**. Otherwise, network overload will cause the migration to fail.

Changing the maximum number of concurrent migrations for all conversion hosts

1. Log in to the CloudForms user interface.
2. Click **Compute** → **Migration** → **Migration Settings**.
3. In the **Migration Throttling** tab, select a value for **Maximum concurrent migrations per conversion host** or **Maximum concurrent migrations per provider** and click **Apply**.
The value of **Maximum concurrent migrations per conversion host** is constrained so that it cannot be greater than **Maximum concurrent migrations per provider**.

Changing the maximum number of concurrent migrations for a specific conversion host

1. Log in to the conversion host using SSH.
2. Obtain the **conversion_host_id**:

```
# curl -sk -u <username>:<password> https://<CloudForms_FQDN>/api/conversion_hosts/
```

1

- 1** Specify the CloudForms FQDN.

3. Enter the following command:

```
# curl -sk -u <username>:<password>  
https://<CloudForms_FQDN>/api/conversion_hosts/<conversion_host_id> -X POST -d  
'{"action": "edit", "resource": {"max_concurrent_tasks": _15_}}'
```

1 2 3 4


- 1** Specify the CloudForms admin username and password.
- 2** Specify the FQDN of the CloudForms machine.
- 3** Specify the **conversion_host_id**.
- 4** Specify the maximum number of concurrent migrations. The default is **10**.

CHAPTER 10. TROUBLESHOOTING

You can review the migration logs, check common issues and mistakes, and known issues.

10.1. MIGRATION LOGS

You can check the conversion host logs, playbook logs, and the CloudForms migration log to identify the cause of a migration error.



IMPORTANT

If you need to open a [Red Hat Support call](#), you must submit both the migration (**virt-v2v**) log and **virt-v2v-wrapper** log for analysis.

10.1.1. Downloading the conversion host and playbook logs

You can download the conversion host and playbooks logs in CloudForms.

When disk migration starts, two logs are created in the conversion host:

- **virt-v2v**: Debug output from **virt-v2v** itself. This log tracks the core of the virtual machine migration process, including **libguestfs** traces and disk migration details.
- **virt-v2v-wrapper**: Log of the daemonizing wrapper for **virt-v2v**. This log traces the orchestration of the virtual machine conversion on the conversion host, including disk migration percentages and **virt-v2v** error reporting.

Procedure

1. Log in to the CloudForms user interface.
2. Click **Compute** → **Migration** → **Migration Plans**.
3. Click a completed migration plan to view its details.
4. Click **Download Log** of a virtual machine and select a log:
 - **Premigration log** This option only appears if a premigration playbook is used.
 - **Migration log** The **Migration log** is the **virt-v2v** log.
 - **Virt-v2v-wrapper log**
 - **Postmigration log** This option only appears if a postmigration playbook is used.

10.1.2. Accessing the CloudForms migration log

This log traces the orchestration of the virtual machine migration in CloudForms.

Procedure

1. Log in to the CloudForms machine using SSH.
2. Navigate to **/var/www/miq/vmdb/log/**.

3. View the **automation.log** file.

10.2. COMMON ISSUES AND MISTAKES

10.2.1. Infrastructure mapping errors

- **Networks missing, Datastores missing, and Clusters missing** error messages
If you create an infrastructure mapping and then change a provider, the provider's object IDs change. Delete the infrastructure mapping and create a new one.
- Storage volume type not detected
Check that you have set at least [one volume type](#).

10.2.2. Migration plan errors

- Virtual machines are being migrated for the first time and are not discovered by the migration plan.
Check that the source datastores and networks appear in the infrastructure mapping.
- Previously migrated virtual machines cannot be discovered by the migration plan.
Use a CSV file to add the virtual machines to the migration plan.
- Virtual machines cannot be added to the migration plan with a CSV file.
Check the CSV file format and fields. Create a new migration plan with the updated CSV file.
- The **Create Migration Plan** wizard hangs while importing a CSV file.
The CSV file is invalid, for example, virtual machines with a duplicate **Name** field and no **Host/Provider** field to distinguish them, or with a duplicate **Name** field and duplicate **Host/Provider** fields. Correct the CSV file, refresh the web page, and create a new migration plan.
- **Unable to migrate VMs because no conversion host was configured at the time of the attempted migration. See the product documentation for information on configuring conversion hosts.**
You can create and save a migration plan whose infrastructure mapping does not contain conversion hosts, but you cannot run the migration plan without conversion hosts. Cancel the migration plan, create the conversion hosts, and run the migration plan again.

10.2.3. IP address errors

If the migrated virtual machine does not have an IP address, check the following:

- Premigration playbook created and added to the migration plan
- VMware Tools installed on the VMware virtual machine
- VMware virtual machine does not have an interface configuration file mapped to a non-existent interface

Log output

```
CalledProcessError: Command '['openstack', u'--os-username=admin', u'--os-identity-api-
version=3', u'--os-user-domain-name=default', u'--os-auth-
url=http://osp.example.com:5000/v3', u'--os-project-name=admin', u'--os-password=*\*****',
```

```
u'--os-project-id=0123456789abcdef0123456789abcdef', 'port', 'create', '--format', 'json', '--network', u'01234567-89ab-cdef-0123-456789abcdef', '--mac-address', u'00:50:56:01:23:45', '--enable', u'port_0', '--fixed-ip', '*ip-address=None*'] returned non-zero exit status 1
__date__ __time__:ERROR: Command output:
BadRequestException: Unknown errors
```

10.2.4. Environment configuration errors

VMware

- A VMware virtual machine cannot be migrated if it has any of the following conditions:
 - Mounted ISO/CDROM disk
 - Invalid name, containing spaces or special characters
 - Powered off during migration
- If you are performing more than ten concurrent migrations from a single VMware hypervisor, you must increase the hypervisor's NFC service memory.

Red Hat OpenStack Platform (RHOSP)

- **disallowed by policy** error
The RHOSP **admin** user in CloudForms does not have **admin** role privileges in the target project. [Add the admin user as member and admin](#) to your target project.

```
ERROR: Command exited with non-zero return code 1, output: HttpException: 403: Client
Error for url: https://example.com:13696/v2.0/ports, {"NeutronError": {"message": "
((rule:create_port and rule:create_port:mac_address) and rule:create_port:fixed_ips) is
disallowed by policy", "type": "PolicyNotAuthorized", "detail": ""}}
```

10.3. KNOWN ISSUES

- **Networks missing** or **Datastore missing** error messages might appear in the CloudForms user interface when you create an infrastructure mapping in a very large environment. These error messages can occur when the number of records for a particular resource in the CloudForms database exceeds the default number (**1000**) of API results displayed per page. If the mapped resource does not appear in the displayed records, it will be missing from the infrastructure mapping.
You can resolve this issue by increasing the maximum number of API results per page so that all of the records are displayed.

Procedure

1. Log in to the CloudForms user interface.
2. In the header bar, click  (**Configuration**).
3. Click the **Settings** accordion and then click **Zones**.
4. Click the zone in which the EVM server is located and select your EVM server.
5. In the **Advanced** tab, change the value of **max_results_per_page** to **10000**.

6. Click **Save**.

APPENDIX B. CONFIGURING THE RED HAT OPENSTACK PLATFORM ENVIRONMENT FOR SSH TRANSFORMATION

You can configure your Red Hat OpenStack Platform (RHOSP) environment for SSH transformation if you cannot use VDDK.



NOTE

The default transformation method, VDDK, is much faster than SSH.

This configuration involves adding the following steps to [Chapter 8, *Preparing the migration environment*](#).

Table B.1. Additional configuration for SSH transformation

Section	Additional configuration for SSH transformation
After Section 8.2, "Preparing the VMware environment"	Go to: • Section B.1, "Configuring the VMware hypervisors for SSH transformation" You can collect the SSH keys from the hypervisors at this time, if your security policies allow. The private key of the SSH key pair that is generated in this step will be used in Section B.2, "Configuring the Red Hat OpenStack Platform conversion hosts for SSH transformation".
Instead of Section 8.4.3, "Configuring the Red Hat OpenStack Platform conversion hosts for VDDK transformation"	Go to: 1. Section B.2, "Configuring the Red Hat OpenStack Platform conversion hosts for SSH transformation" 2. Section B.3, "Copying the VMware SSH keys to the conversion hosts"

B.1. CONFIGURING THE VMWARE HYPERVISORS FOR SSH TRANSFORMATION

For SSH transformation, you must enable SSH access and copy a public SSH key to each VMware hypervisor. The corresponding private key will be used to configure the conversion hosts.



IMPORTANT

A single SSH key pair is recommended because this key pair is used only for virtual machine conversion and it simplifies conversion host management.

If you wish to use a dedicated SSH key pair for each conversion host, you can copy the public key of each conversion host to all the VMware hypervisors.

Procedure

1. Enable SSH access on each VMware hypervisor, according to the VMware documentation:
 - a. In a browser, navigate to [VMware vSphere Documentation](#).
 - b. Enter **Enable ESXi Shell and SSH Access with the Direct Console User Interface** in the **Search** field and select your VMware version.
 - c. Click the **HTML** icon to view the procedure.
You can collect the SSH public keys of the VMware hypervisors at this stage, to copy to the conversion hosts.
2. Generate an SSH key pair without a passphrase:

```
# ssh-keygen -N "
```

3. Copy the public SSH key to **/etc/ssh/keys-root/authorized_keys** on **each** VMware hypervisor.
You will use the private SSH key to configure the conversion hosts.

B.2. CONFIGURING THE RED HAT OPENSTACK PLATFORM CONVERSION HOSTS FOR SSH TRANSFORMATION

You can configure the Red Hat OpenStack Platform (RHOSP) conversion hosts for SSH transformation in the CloudForms user interface.

Procedure

1. In CloudForms, click **Compute → Migration → Migration Settings**.
2. In the **Conversion Hosts** tab, click **Configure Conversion Host**. The **Configure Conversion Host** wizard is displayed.

3. In the **Location** screen, select a **Provider Type**.
4. Select a **Provider**.
5. Select a **Project** and click **Next**.
6. In the **Host(s)** screen, select one or more hosts from the dropdown list and click **Next**.
7. In the **Authentication** screen, click **Browse** to browse to the SSH private key of the SSH key pair that you used when you created the conversion host or paste the key in the **Conversion host SSH private key** field.
CloudForms uses this private SSH key to connect to the conversion host.
8. Select **SSH** as the **Transformation method**.
9. Click **Browse** to browse to the SSH private key you created for enabling SSH access on the VMware hypervisors or paste it in the **VMware hypervisors SSH private key** field
10. Click **Configure**.
11. In the **Results** screen, wait for the conversion host configuration to finish and click **Close**.
The configured conversion hosts and status information, including error messages, appear in the **Configured Conversion Hosts** list.

If an error occurs, you can download the conversion host configuration log by clicking the **More Actions** icon () and selecting **Download Log**.

You can click **Retry** if the conversion host configuration failed for reasons unconnected with your environment.

B.3. COPYING THE VMWARE SSH KEYS TO THE CONVERSION HOSTS

Copy the SSH public keys of the VMware hypervisors to the conversion hosts.

You can collect the VMware keys either when you configure the VMware hypervisors for SSH transformation or by using **ssh-keyscan**.

B.3.1. Copying keys collected during VMware hypervisor configuration

1. Copy the VMware keys to **/root/.ssh/known_hosts** on each conversion host.
2. On each conversion host, verify the SSH connection by connecting to each VMware hypervisor:

```
$ sudo ssh root@<Vmware_host_name> 1
```

- 1 Specify the host name of the VMware hypervisor.

If the SSH connection fails, check that the VMware hypervisor has SSH access enabled and that you copied the correct keys. Otherwise, all migrations from that hypervisor using SSH transformation will fail.

B.3.2. Copying keys collected with ssh-keyscan

You must run **ssh-keyscan** for **each VMware hypervisor**. Otherwise your conversion hosts will not have all the VMware hypervisor keys and the migration will fail.

Perform the following procedure on each conversion host:

1. Run **ssh-keyscan** for each VMware hypervisor and copy its public key to **known_hosts**, as in the following example:

```
$ ssh-keyscan <Vmware_host_1_ip> | sudo tee -a /root/.ssh/known_hosts 1
$ ssh-keyscan <Vmware_host_2_ip> | sudo tee -a /root/.ssh/known_hosts
$ ssh-keyscan <Vmware_host_3_ip> | sudo tee -a /root/.ssh/known_hosts
```

- 1 Specify the IP address, not the host name, of each VMware hypervisor.

2. Verify the SSH connection by connecting to each VMware hypervisor:

```
$ sudo ssh root@<Vmware_host_name> 1
```

- 1 Specify the host name of the VMware hypervisor.

If the SSH connection fails, check that the VMware hypervisor has SSH access enabled and that you copied the correct keys. Otherwise, all migrations from that hypervisor using SSH transformation will fail.